

Closed-form and finite difference solutions to a population balance model of grinding mills

Raimund Bürger (buerger@mathematik.uni-stuttgart.de)

Institute of Applied Analysis and Numerical Simulation, University of Stuttgart, Pfaffenwaldring 57, D-70569 Stuttgart, Germany

Kenneth H. Karlsen (kennethk@mi.uib.no)

Department of Mathematics, University of Bergen, Johs. Brunsgt. 12, N-5008 Bergen, Norway, and Centre of Mathematics for Applications (CMA), Department of Mathematics, University of Oslo, P.O. Box 1053, Blindern, N-0316 Oslo, Norway

John D. Towers (jtowers@cts.com)

MiraCosta College, 3333 Manchester Avenue, Cardiff-by-the-Sea, CA 92007-1516, USA

February 16, 2004

Abstract. The wear of steel balls in continuously operated grinding mills, used in mineral processing to comminute metalliferous rocks, can be described by a simple population balance model. This model gives rise to a scalar transport equation with a singular source term for the number density of balls as a function of size and time. Exact solutions to this equation are determined under the assumption of a simple power-law type wear law. It is shown that a particular term proposed in the engineering literature that describes the removal of used balls from the mill leads to negative solutions (Model 1). An alternative, more realistic term for the sieve action, which admits nonnegative solutions only, is introduced (Model 2). A working first-order finite difference scheme for Model 2 and a second-order TVD variant are introduced and applied for numerical simulations along with an error study. A weak solution concept for Model 2 is proposed, uniqueness of weak solutions is shown and convergence of the first-order scheme to a weak solution is established. These results hold for a general class (not just power-law type) wear laws.

Keywords: population balance model, linear transport equation, finite-difference scheme, TVD scheme, numerical simulation, uniqueness, existence

1. Introduction

Population balance models were originally applied to model biological populations and were formulated for chemical engineering purposes in the celebrated paper by Hulburt and Katz [1]. Currently, these models are widely used to describe and control a wide range of particulate processes including comminution, crystallization, granulation, flocculation, combustion and polymerization [2]. An extensive review of applications of population balance models in engineering is given in the book by Ramkrishna [3].

In this paper, we consider a very simple population balance model for the wear of steel balls that are used in grinding mills to aid the crushing of minerals [4, Ch. 20]. These balls are assumed to be made of the same material, and the only property in which they differ is the size x , which is the only coordinate that appears (besides time) in our population balance model. Since the steel consumption due to ball wear is a decisive cost factor in the operation of a ball mill, there is considerable engineering interest in identifying the appropriate wear law, in mathematical models predicting the ball size distribution and in implementing them, for example, to optimize the make-up ball charge in a grinding mill (see [5–8]).

We are interested in determining the ball size distribution as a function of time. Thus, the sought quantity is the number density $u = u(x, t)$ as a function of ball size x and time t ,



which means that the number of balls having size between x_a and x_b at time t is given by

$$n(x_a, x_b, t) = \int_{x_a}^{x_b} u(\xi, t) d\xi.$$

We assume that the rate of decrease of the diameter of a ball of size x is given by a function $g = g(x)$. A frequently used equation is

$$g(x) = \alpha(x/x_0)^\beta, \quad 0 \leq \beta \leq 1, \quad \alpha < 0, \quad (1.1)$$

where x_0 is a reference size. In the mineral processing literature, the parameter β is sometimes referred to as ‘Austin-Klimpel parameter’ [9]. The value $\beta = 0$ corresponds to the Bond wear law [10, 11], stating that the wear rate of a ball is proportional to its surface area, while $\beta = 1$ is the Davis wear law [12] postulating that the wear rate is proportional to the ball volume. The former case corresponds to an abrasive mechanism of ball size reduction and the latter to an impactive one. Real ball mills usually exhibit a combination of both mechanisms, which suggests admitting the whole parameter interval $\beta \in [0, 1]$. Furthermore, we assume that the grinding process is controlled by the total number feed rate $Q_F(t)$ of new balls at the inlet of the mill, and by the relative number frequency $m_F(x)$ of balls of size x at the inflow. The new balls are assumed to have the p discrete sizes $x^1 > x^2 > \dots > x^p$. The discharge of balls is controlled by a sink term $q_D = q_D(x, t, u)$. We will discuss two alternative specific choices for this term later. Under the present assumptions and letting $\delta(\cdot)$ denote the usual Dirac δ function, we can state the governing equation of the population balance model as

$$\frac{\partial u}{\partial t} + \frac{\partial}{\partial x}(g(x)u(x, t)) = Q_F(t) \sum_{k=1}^p m_F^k \delta(x - x^k) - q_D(x, t, u), \quad (1.2)$$

where $m_F^k := m_F(x^k)$, and we assume that an initial particle size distribution is given as

$$u(x, 0) = u_0(x), \quad x \in [0, x^p]. \quad (1.3)$$

Equation (1.2) can be written in conservative form as

$$\frac{\partial u}{\partial t} + \frac{\partial}{\partial x} \left(g(x)u(x, t) - Q_F(t) \sum_{k=1}^p m_F^k H(x - x^k) + Q_D(t)H(x - x_{\min}) \right) = -q_D(x, t, u), \quad (1.4)$$

where $H(\cdot)$ is the Heaviside function. Equation (1.4) is a first-order transport equation with a discontinuous coefficient and a source term. We consider (1.4) on the domain

$$\Pi_T := \{(x, t) : 0 < x < X, 0 < t < T\}, \quad \overline{\Pi}_T := \Pi_T \cup \partial\Pi_T, \quad (1.5)$$

where X is a maximum ball size with $X > x^1$, where x^1 is the size of the largest feed balls. Recall that balls are always ground to smaller size, so $u(X, T) = 0$ for $t \in (0, T]$ arises as a natural boundary condition for (1.4).

The remainder of this paper is organized as follows. In Section 2 we first derive a closed-form solution of Model 1 with $g(x)$ given by (1.1) and the term $q_D(x, t, u)$ used in [6, 7]. It turns out that this choice implies negative number densities in certain cases. We propose an alternative discharge term $q_D(x, t, u)$, which models the sieve, through which the used balls are discharged, more realistically. This alternative model is referred to as ‘Model 2’. Exact

solutions to Model 2 combined with the wear law (1.1) are determined and visualized for five different combinations of the parameters α and β . We illustrate that solutions of Model 2 are nonnegative but in general unbounded.

In general it may become complicated to derive closed-form solutions. Moreover, even if “representation formulas” for the solutions can be found, they typically involve integrals that must be evaluated numerically. Hence, numerical schemes to produce approximate solutions may be desirable. The design of such schemes is the topic of Section 3. In Subsection 3.1 we introduce a simple first-order upwind difference scheme, while in Subsection 3.2 we present a novel second-order version of the scheme. The novelty of this algorithm lies in our choice of a regularity condition to enforce. Our motivation here is that the actual solution of a conservation law with discontinuous coefficients is not itself Total Variation Diminishing (TVD), whereas its flux does have this regularity property. We refer to this property as flux-TVD. Thus, in our second-order scheme, we apply flux limiters that enforce the flux-TVD property, rather than the standard TVD property for nonlinear conservation laws. Section 4 presents numerical simulations and an error study for Model 2 for three values of β , using both the first-order and the second-order schemes. Both schemes accurately approximate the stationary jumps in the solution located at $x = x^1, \dots, x^p$ at any discretization. Away from these locations, jumps of the solution are smeared out by artificial diffusion, where the degree of smearing depends on the spatial accuracy and order of the method. This is, of course, the well-known behaviour of standard schemes for conservation laws [13].

The numerical examples and recorded errors illustrate the gain in accuracy attained by using the second-order variant of the scheme for transient solutions. On the other hand, we see that due to the presence of stationary discontinuities, large time, near steady state solutions are approximated to at most first order (in the L^1 sense) by both schemes.

On the rigorous mathematical side, we have in this paper included two appendices on the analysis of Model 2. As candidate solutions are in general discontinuous, they need to be defined as weak solutions. The unboundedness of solutions requires that we also introduce a particular weighted L^1 norm. The solution concept along with a statement of the assumptions is presented in Appendix A, which also includes a uniqueness theorem for weak solutions. As a theoretical justification of our numerical scheme, we prove in Appendix B that the first-order version of our scheme converges as the discretization parameters tend to zero to the unique weak solution of Model 2. A feature of our analysis is that we establish compactness of the numerical flux, not the numerical solution itself, by bounding its total variation. The specific design of the second order scheme in Subsection 3.2 is motivated by this feature.

2. The ball mill models and closed-form solutions

2.1. MODEL 1

Models 1 and 2 differ in the description of the discharge mechanism. According to Menacho and Concha [6, 7], there exists a size x_{\min} at which the balls leave the mill. Balls of this size are extracted at the prescribed discharge number rate $Q_D(t) \geq 0$, such that

$$q_D(x, t, u) = Q_D(t)\delta(x - x_{\min}). \quad (2.1)$$

We now determine an exact solution to Model 1, that is, to (1.2) (or (1.4)) with the initial condition (1.3) and (2.1). Using the method of characteristics for the homogeneous problem

$$\frac{\partial u}{\partial t} + \frac{\partial}{\partial x}(g(x)u) = 0, \quad u(x, 0) = u_0(x),$$

we obtain the homogeneous solution

$$u_H(x, t) = \frac{g(\xi(x, t))}{g(x)} u_0(\xi(x, t)),$$

where $\xi(x, t)$ is the location where the backward characteristic through (x, t) intersects the x -axis. An explicit formula for $\xi(x, t)$ when $g(x)$ is given by (1.1) is

$$\xi(x, t) = \begin{cases} x \exp(-\alpha t/x_0) & \text{for } \beta = 1, \\ \left[x^{1-\beta} - \frac{\alpha}{x_0^\beta} (1-\beta)t \right]^{\frac{1}{1-\beta}} & \text{for } \beta < 1. \end{cases} \quad (2.2)$$

Note that $\xi(x, 0) = x$, and $\xi(x, t) > x$ for $t > 0$, since the characteristics flow from right to left in the x - t plane. For the inhomogeneous problem with right-hand side $R(x, t)$, i.e.

$$\frac{\partial u}{\partial t} + \frac{\partial}{\partial x}(g(x)u) = R(x, t), \quad u(x, 0) = u_0(x),$$

an application of Duhamel's principle [14] yields

$$u(x, t) = u_H(x, t) + \int_0^t \frac{g(\xi(x, t-s))}{g(x)} R(\xi(x, t-s), s) ds.$$

When $R = R(x)$, it is possible to simplify the inhomogeneous portion of the solution by making a change of variables. We let $\sigma = \xi(x, t-s)$ and after some algebra, discover that $ds = d\sigma/g(\sigma)$. The solution then reduces to

$$u(x, t) = u_H(x, t) - \frac{1}{g(x)} \int_x^{\xi(x, t)} R(\sigma) d\sigma = u_H(x, t) + \frac{1}{g(x)} \int_{\xi(x, t)}^x R(\sigma) d\sigma.$$

When the right-hand side R takes the following specific form:

$$R(x) = Q_F \sum_{k=1}^p m_F^k \delta(x - x^k) - Q_D \delta(x - x_{\min}),$$

which corresponds to choosing constant feed and discharge rates Q_F and Q_D in Model 1, the solution finally turns out to be

$$u(x, t) = u_H(x, t) + \frac{1}{g(x)} \left[Q_F \sum_{k=1}^p m_F^k \chi_{[x, \xi(x, t)]}(x^k) - Q_D \chi_{[x, \xi(x, t)]}(x_{\min}) \right], \quad (2.3)$$

where $\chi_{[a, b]}(x)$ denotes the characteristic function of an interval $[a, b]$. Note that (2.3) defines a function that is in general discontinuous across the straight lines $x = x^1, \dots, x^p, x_{\min}$ and the curves $t \mapsto (\xi(x^k, t), t)$, $k = 1, \dots, p$ and $t \mapsto (\xi(x_{\min}, t), t)$. Consequently, (2.3) does not

satisfy (1.4) in a pointwise sense; rather, this function is a weak solution. The appropriate mathematical concept of weak solutions is detailed in Appendix A.

Model 1 has successfully solved some engineering problems [6, 7], but it has a shortcoming that becomes apparent in (2.3). Namely, the discharge rate of balls at a given point of time does not involve the solution u . To illustrate the consequence of this property, assume that we start from an empty ball mill ($u_0 \equiv 0$) and feed no new balls into it ($Q_F = 0$), but let $Q_D > 0$, i.e. one attempts to extract balls at a given rate. A sound mathematical model should then predict a zero discharge flux of balls, and that the ball mill remains empty, i.e. $n(x_a, x_b, t) = 0$ for all $0 \leq x_a < x_b \leq X$. However, (2.3) implies $u(x, t) = -Q_D \chi_{[x, \xi(x, t)]}(x_{\min})/g(x)$ and in particular $n(x_a, x_b, t) < 0$ if $(x_a, x_b) \cap (\xi(x, t), x) \neq \emptyset$. Negative densities and numbers are, however, undesirable and call for improvement of Model 1.

2.2. MODEL 2

Model 1 can be improved if we model the discharge mechanism in a different way. Instead of assuming that there is a prescribed discharge rate of balls of a determined size, which seems quite unrealistic and difficult to implement, we consider that balls of size $x \leq x_s$ fall automatically at all times through the discharge sieve of meshwidth x_s . This selection effect can be considered if we skip the discharge term from (3.1) and rewrite the equation in integral form. Then we have, first without sieve and considering $x_a, x_b \neq x^1, \dots, x^p$,

$$\begin{aligned} n(x_a, x_b, t + \Delta t) - n(x_a, x_b, t) = & - \int_t^{t+\Delta t} (g(x_b)u(x_b, \tau) - g(x_a)u(x_a, \tau)) d\tau \\ & + \sum_{k=1, x_a < x^k < x_b}^p m_F^k \int_t^{t+\Delta t} Q_F(\tau) d\tau. \end{aligned} \quad (2.4)$$

The sieve is not present if $x_a > x_s$. Moreover, we assume that the action of the sieve is also associated with a time-dependent control function $Q_S(t)$. The total amount of balls of size between x_a and x_b that are sieved out in the time interval $[t, t + \Delta t]$ is given by

$$n_S(x_a, x_b, t, t + \Delta t) = \int_t^{t+\Delta t} \int_{x_a}^{x_b} Q_S(\tau) \chi_{[0, x_s]}(\xi) u(\xi, \tau) d\xi d\tau.$$

This quantity has to be subtracted from the right-hand side of (2.4) to appropriately model the sieve action. Thus, the alternative discharge term is

$$q_D(x, t, u) = m_F^k \delta(x - x^k) Q_S(t) \chi_{[0, x_s]}(x) u(x, t). \quad (2.5)$$

Observe that the equation (1.2) in conjunction with (2.5) is still linear, but slightly more involved than the equation for Model 1 since the sink term now depends on the solution u . For easy reference, we rewrite the governing equation for Model 2 as

$$\frac{\partial u}{\partial t} + \frac{\partial}{\partial x} \left(g(x)u(x, t) - Q_F(t) \sum_{k=1}^p m_F^k H(x - x^k) \right) = -Q_S(t) \chi_{[0, x_s]}(x) u(x, t). \quad (2.6)$$

We will limit the further analysis to that case. We should expect that unlike Model 1, Model 2 produces nonnegative solutions only. This will be established in Section 6 by the analysis of a difference scheme.

2.3. EXACT SOLUTION OF MODEL 2

To simplify the analysis, we assume that the coefficients are time-independent, and we simplify the notation for the sieve term by setting

$$b(x) := -Q_S \chi_{[0, x_s]}(x). \quad (2.7)$$

Using the method of characteristics for the resulting homogeneous problem

$$\frac{\partial u}{\partial t} + \frac{\partial}{\partial x}(g(x)u) - b(x)u = 0, \quad u(x, 0) = u_0(x),$$

we obtain the homogeneous solution

$$u_H(x, t) = \frac{g(\xi)}{g(x)} u_0(\xi) \exp \left(\int_{\xi}^x \frac{b(s)}{g(s)} ds \right),$$

where $\xi(x, t)$ is given by (2.2) if $g(x)$ is defined by (1.1).

For the inhomogeneous problem with a time-independent right-hand side $R(x)$, i.e.,

$$\frac{\partial u}{\partial t} + \frac{\partial}{\partial x}(g(x)u) - b(x)u = R(x), \quad u(x, 0) = u_0(x),$$

we apply Duhamel's principle as we did for Model 1, this time obtaining

$$u(x, t) = u_H(x, t) + \int_0^t w(x, t, \tau) d\tau, \quad (2.8)$$

where

$$w(x, t, \tau) := \frac{g(\hat{\xi})}{g(x)} R(\hat{\xi}) \exp \left(\int_{\hat{\xi}}^x \frac{b(s)}{g(s)} ds \right), \quad \hat{\xi} := \xi(x, t - \tau).$$

With the change of variables $\rho = \hat{\xi} = \xi(x, t - \tau)$, $d\tau = d\rho/g(\rho)$, the solution then reduces to

$$u(x, t) = u_H(x, t) - \frac{1}{g(x)} \int_x^{\xi(x, t)} R(\rho) \exp \left(\int_{\rho}^x \frac{b(s)}{g(s)} ds \right) d\rho. \quad (2.9)$$

For Model 2 with constant feed rates, the right-hand side R consists of a sum of source terms:

$$R(x) = Q_F \sum_{k=1}^p m_F^k \delta(x - x^k),$$

The presence of the δ functions allows us to simplify the exact solution, since

$$\begin{aligned} \int_x^{\xi(x, t)} R(\rho) \exp \left(\int_{\rho}^x \frac{b(s)}{g(s)} ds \right) d\rho &= \int_x^{\xi(x, t)} Q_F \sum_{k=1}^p m_F^k \delta(\rho - x^k) \exp \left(\int_{\rho}^x \frac{b(s)}{g(s)} ds \right) d\rho \\ &= Q_F \sum_{k=1}^p m_F^k \chi_{[x, \xi(x, t)]}(x^k) \exp \left(\int_{x^k}^x \frac{b(s)}{g(s)} ds \right). \end{aligned}$$

Substituting this expression into (2.9), we obtain

$$u(x, t) = u_H(x, t) - \frac{Q_F}{g(x)} \sum_{k=1}^p m_F^k \chi_{[x, \xi(x, t)]}(x^k) \exp \left(\int_{x^k}^x \frac{b(s)}{g(s)} ds \right), \quad (2.10)$$

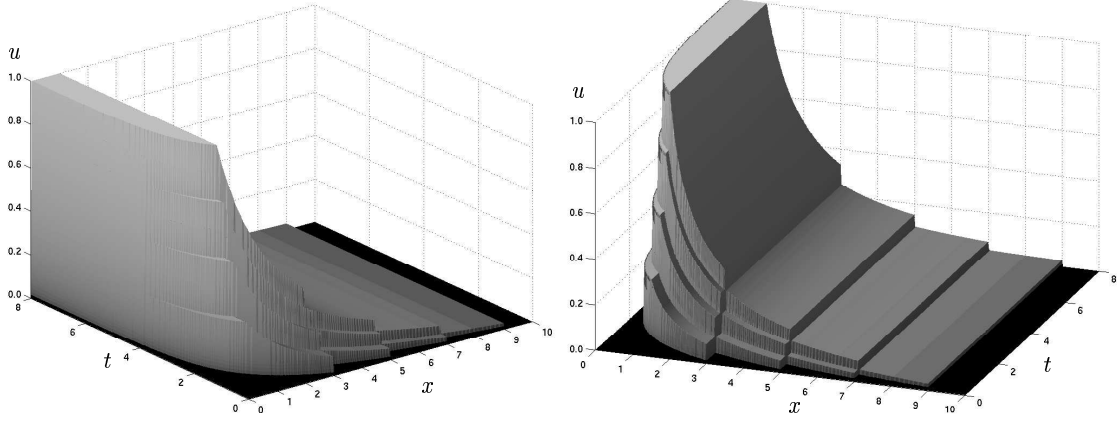


Figure 1. Exact solution of Model 2 with $\beta = 0$.

where $\chi_{[a,b]}(x)$ denotes the characteristic function of an interval $[a, b]$. Using (2.7), it is possible to work out explicit formulas for the integrals of the form

$$\mathcal{I}(z_1, z_2) := \int_{z_1}^{z_2} \frac{b(s)}{g(s)} ds$$

that appear in both the homogeneous and inhomogeneous portions of the solution. Specifically for the wear law (1.1), we get

$$\mathcal{I}(z_1, z_2) = -\frac{Q_S x_0^\beta}{\alpha} \begin{cases} \ln(\min\{x_s, z_2\}) - \ln(\min\{x_s, z_1\}) & \text{for } \beta = 1, \\ \frac{1}{1-\beta} \left((\min\{x_s, z_2\})^{1-\beta} - (\min\{x_s, z_1\})^{1-\beta} \right) & \text{for } \beta \neq 1. \end{cases}$$

It is evident from this formula that $\mathcal{I}(z_1, z_2) = 0$ if both $z_1 \geq x_s$ and $z_2 \geq x_s$, indicating that the sieve has no affect on the solution for $x > x_s$. For easy reference, we collect in one place the exact solution for the equation to be simulated numerically:

$$u(x, t) = u_H(x, t) - \frac{Q_F}{g(x)} \sum_{k=1}^p m_F^k \chi_{[x, \xi(x, t)]}(x^k) \exp(\mathcal{I}(x^k, x)), \quad (2.11)$$

where

$$u_H(x, t) = \frac{g(\xi)}{g(x)} u_0(\xi) \exp(\mathcal{I}(\xi, x)), \quad \xi(x, t) = \begin{cases} x \exp(-\alpha t / x_0) & \text{for } \beta = 1, \\ \left[x^{1-\beta} - \frac{\alpha}{x_0^\beta} (1-\beta) t \right]^{\frac{1}{1-\beta}} & \text{for } \beta < 1. \end{cases}$$

Like the solution constructed in Section 2.1, the solution defined by (2.11) is discontinuous, and must be understood as a weak solution, as defined in Appendix A.

We illustrate the solution by considering an initially empty ball mill, $u_0 \equiv 0$, for which $u_H \equiv 0$, and are particularly interested in the behaviour of the solution for $x \rightarrow 0$. It is straightforward to derive the bounded solution in tensor product form

$$u(x, t) = -\exp\left(\frac{Q_S}{\alpha}(x_s - x)\right) \sum_{k=1}^p m_F^k H(-\alpha t - x^k) \quad (2.12)$$

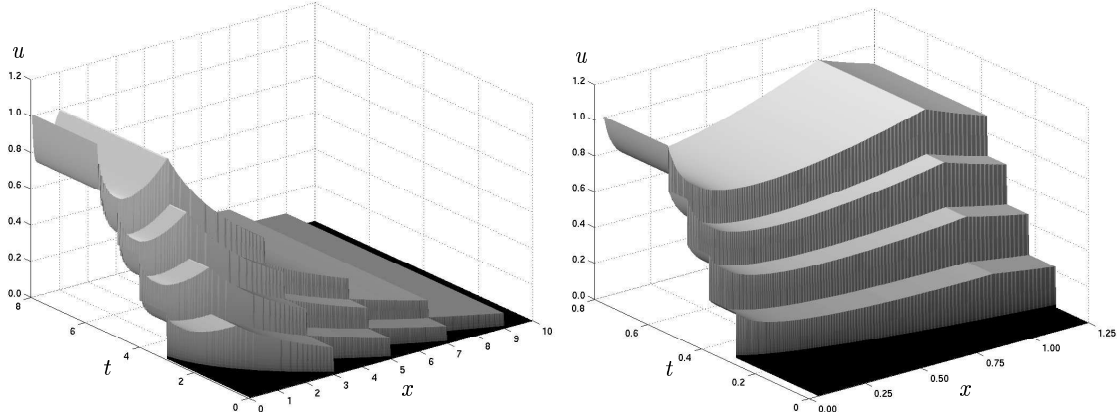


Figure 2. Exact solution of Model 2 with $\beta = 0.5$, which becomes unbounded for $x \downarrow 0$ and is plotted for $x \in [0.04, 10]$ (left) and $x \in [0.04, 1.25]$ (right).

for $\beta = 0$ and $x < x_s$. This means that $u(0, t)$ is just a scaled version of the cumulative size distribution of the feed balls, and in particular a piecewise constant function bounded by one.

In the examples plotted here, we chose the parameters $\alpha = -1$, $x_0 = 1$, $Q_F = 1$, $x_s = 1$, $p = 4$, and $x^k = 1 + 2k$ and $m_F(x^k) = 0.25$ for $k = 1, \dots, 4$. Figure 1 shows the solution for this case ($\beta = 0$) with $Q_S = 1$.

Next, we consider the range $0 < \beta < 1$, for which

$$\lim_{x \downarrow 0} \mathcal{I}(x^k, x) = -\frac{Q_S x_0^\beta x_s^{1-\beta}}{\alpha(1-\beta)},$$

which is a well-defined negative constant, and consequently,

$$\frac{\exp(\mathcal{I}(x^k, x))}{g(x)} = \frac{\exp(\mathcal{I}(x^k, x))}{x^\beta} \rightarrow -\infty \quad \text{as } x \downarrow 0. \quad (2.13)$$

Moreover,

$$\xi(0, t) = \left(-\frac{\alpha}{x_0^\beta} (1-\beta)t \right)^{\frac{1}{1-\beta}} \quad \text{for } 0 < \beta < 1. \quad (2.14)$$

We obtain $u(0, t) = 0$ as long as all summands in (2.10) vanish, that is, as long as $\xi(0, t) < x^1$. From (2.14) we deduce that this holds for

$$t < t^* := -\frac{x_0^\beta}{\alpha(1-\beta)} (x^1)^{\frac{1}{1-\beta}};$$

for $\beta = 0.5$ and the remaining parameters as given above, we get $t^* = 2\sqrt{3} = 3.464$. For $t > t^*$, (2.13) implies $u(x, t) \rightarrow \infty$ as $x \downarrow 0$. Figure 2 shows the solution for this case.

For $\beta = 1$ and $x < x_s$, we have

$$\exp(\mathcal{I}(x^k, x)) = \exp\left(-\frac{Q_S x_0}{\alpha} \ln(x/x_s)\right) = (x/x_s)^{-\frac{Q_S x_0}{\alpha}}$$

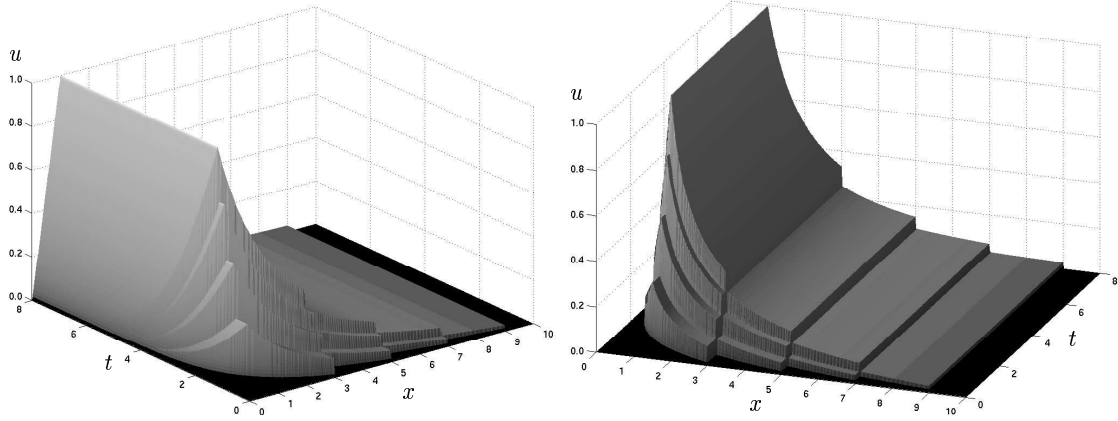


Figure 3. Exact solution of Model 2 with $\beta = 1$ and $\alpha > -Q_S x_0$.

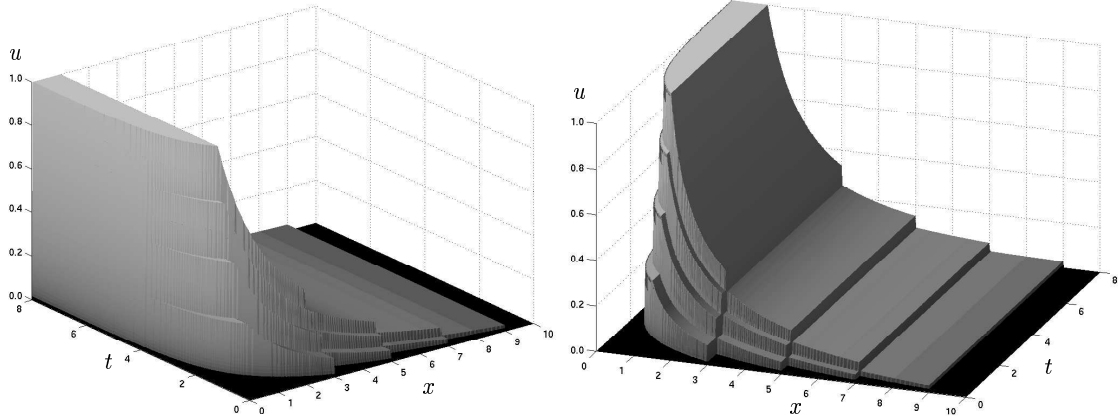


Figure 4. Exact solution of Model 2 with $\beta = 1$ and $\alpha = -Q_S x_0$.

and therefore

$$u(x, t) = -\frac{Q_F x_0}{\alpha} x_s^{\frac{Q_S x_0}{\alpha}} x^{-1 - \frac{Q_S x_0}{\alpha}} \sum_{k=1}^p m_F^k \chi_{[x, x \exp(-\alpha t/x_0)]}(x^k). \quad (2.15)$$

For $\alpha > -Q_S x_0$, we obtain a continuous function of x that vanishes at $x = 0$ and multiplies a finite sum. In this case we have $u(0, t) = 0$.

For $\alpha = -Q_S x_0$, we get for $x < x_s$

$$u(x, t) = \frac{Q_F x_0}{Q_S x_s} \sum_{k=1}^p m_F^k \chi_{[x, x \exp(Q_S t)]}(x^k). \quad (2.16)$$

For $x = 0$, all the summands in (2.16) are zero, and therefore $u(0, t) = 0$. However, it is instructive to note that for any fixed value $x_* \in (0, x_s)$, we have

$$\lim_{t \rightarrow \infty} u(x_*, t) = \frac{Q_F x_0}{Q_S x_s},$$

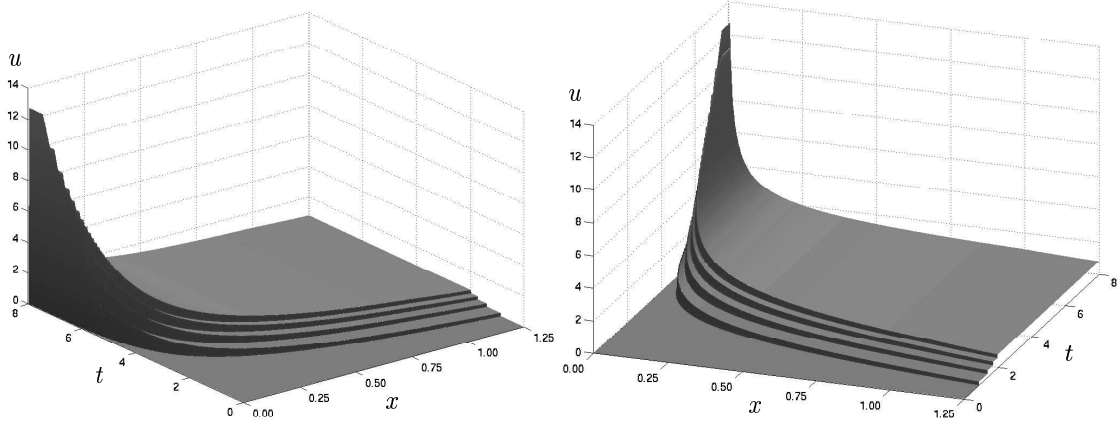


Figure 5. Exact solution of Model 2 with $\beta = 1$ and $\alpha < -Q_S x_0$.

since $x^1, \dots, x^p \in [x_*, x_* \exp(Q_S t)]$ for t sufficiently large, and thus the value of the sum is $m_F^1 + \dots + m_F^p = 1$.

For $\alpha < -Q_S x_0$, the solution at $x = 0$ is not defined. The solution becomes unbounded for $x > 0$ sufficiently small and t sufficiently large. To see this, fix $x_* \in (0, x_s)$; we then have

$$u(x, t) > -\frac{Q_F x_0}{\alpha} x_s^{\frac{Q_S x_0}{\alpha}} x_*^{-1 - \frac{Q_S x_0}{\alpha}} \quad \text{for } x \in (0, x_*) \text{ and } t > -\frac{x_0}{\alpha} \ln(x^p/x_*).$$

The solutions for $\beta = 0.5$ and the three cases of α are plotted in Figures 3, 4, and 5, respectively, and correspond to $Q_S = 2, 1$ and 0.5 , and the other parameters as chosen before.

3. Finite difference schemes

Equation (2.6) can be written as

$$\frac{\partial u}{\partial t} + \frac{\partial}{\partial x}(g(x)u + \gamma(t)a(x)) = b(x, t)u, \quad (x, t) \in \Pi_T, \quad (3.1)$$

where Π_T is defined in (1.5), $\gamma(t) := -Q_F(t)$, and

$$a(x) := \sum_{k=1}^p m_F^k H(x - x^k), \quad b(x, t) := -Q_S(t)\chi_{[0, x_s]}(x). \quad (3.2)$$

We consider (3.1) together with the initial condition

$$u(x, 0) = u_0(x), \quad x \in (0, X), \quad (3.3)$$

and the boundary condition at the right boundary

$$u(X, t) = 0, \quad t \in (0, T]. \quad (3.4)$$

No boundary condition is required at $x = 0$. Our assumptions on the data are the following:

$$g \text{ is absolutely continuous on } [0, X], \quad g(x) \leq 0 \text{ on } [0, X], \quad g(x) < 0 \text{ on } (0, X], \quad (3.5)$$

$$a(x) \geq 0, a \in L^\infty((0, X]), a \text{ is nondecreasing on } (0, X), \quad (3.6)$$

$$a(x) \text{ is constant on some interval } [X - \delta_a, X], \text{ for some } \delta_a \in (0, X], \quad (3.7)$$

$$b(x, t) \leq 0, \text{ and } b \in L^\infty(\Pi_T), \quad (3.8)$$

$$\gamma(t) \leq 0, \gamma \in BV([0, T]), \quad (3.9)$$

$$u_0(x) \geq 0, u_0 \in BV([0, X]). \quad (3.10)$$

To aid readability, we define $A := \|a\|_{L^\infty}$, $B := \|b\|_{L^\infty}$, $\Gamma := \|\gamma\|_{L^\infty}$, and $G := \|g\|_{L^\infty}$.

REMARK 3.1. Concerning condition (3.5), when devising and analysing numerical schemes, we are allowing $g(x)$ to be of slightly more general form than the class of wear rates given by (1.1). Also, we note for future reference that condition (3.5) implies that $g \in BV([0, X])$.

We now turn to the description of our numerical algorithms. In Section 3.1, we construct a first order upwind scheme. In Section 3.2 we modify this first order scheme to achieve improved accuracy. We propose a new design approach, the so-called flux-TVD principle, which we use to derive a regularizing process that damps out spurious oscillations caused by the second order correction terms. The analysis of our first-order scheme appears in Appendix B, and we defer the analysis of our new second-order scheme to a future paper.

3.1. FIRST-ORDER SCHEME

Associated with an integer $J^\Delta > 0$, define the spatial mesh size $\Delta x = X/J^\Delta$. We fix the parameter λ and define the temporal mesh size $\Delta t = \lambda \Delta x$, always assuming that the following CFL condition is satisfied:

$$\lambda G + \Delta t B \leq 1. \quad (3.11)$$

Let $N^\Delta := \lfloor T/\Delta t \rfloor + 1$, so that $T \leq N^\Delta \Delta t < T + \Delta t$. The symbol Δ refers to the discretization defined by $(\Delta x, \Delta t) = (\Delta x, \lambda \Delta x)$. The spatial domain \mathbb{R} is discretized into cells $I_j := [x_j, x_{j+1})$, where $x_j := j\Delta x$ for $j = 0, \dots, J^\Delta$. Similarly, the time interval $[0, T]$ is discretized via $t_n := n\Delta t$ for $n = 0, \dots, N$, resulting in the time strips $I^n := [t_n, t_{n+1})$. We let $\chi_j(x)$ and $\chi^n(t)$ be the characteristic functions for the intervals I_j and I^n , respectively. We let $\chi_j^n(x, t) := \chi_j(x)\chi^n(t)$ be the characteristic function for the rectangle $R_j^n := I_j \times I^n$. To simplify the presentation, we use Δ_+ and Δ_- to designate the difference operators in the x direction, e.g., $\Delta_+ h_j^n = h_{j+1}^n - h_j^n = \Delta_- h_{j+1}^n$. Our first-order scheme is then

$$U_j^{n+1} = \begin{cases} U_j^n - \lambda \Delta_+(g_j U_j^n + \gamma^n a_j) + \Delta t b_j^n U_j^n & \text{for } j \neq J^\Delta, \\ U_j^n + \lambda g_j U_j^n + \Delta t b_j^n U_j^n & \text{for } j = J^\Delta. \end{cases} \quad (3.12)$$

For the sake of simplicity, we will always use the first formula, which is possible with the understanding that $U_{J^\Delta}^n, U_{J^\Delta+1}^n \equiv 0$ (which enforces the boundary condition (3.4)), and $a_{J^\Delta+1} \equiv a_{J^\Delta}$. In view of the hypothesis (3.7), this last condition will hold as soon as the mesh size is sufficiently small. Here, we let $g_j := g(x_j)$, $a_j := a(x_j)$, $\gamma^n := \gamma(t^n)$ and $b_j^n := b(x_j, t^n)$. Note that the scheme (3.12) is one-sided, in particular that it is biased to the right, the direction of incoming information, i.e., the scheme is upwind. Recall that we are assuming $g(x) \leq 0$, so that characteristics flow from right to left.

3.2. SECOND-ORDER SCHEME

Ignoring for the moment the contribution of the sieve term and the source terms, we see that the scheme proposed in the previous section is a first order upwind scheme for a scalar conservation law. By the end of the 1980's many methods of modifying such first order schemes to achieve higher order accuracy had been proposed [17–19]. The challenge faced by the designers of such schemes is that any naive attempt to improve accuracy will introduce oscillations in regions of rapid transition. For this reason, virtually all of the successful higher order schemes employ some limiting process that reduces the contribution of the higher order correction terms wherever a rapid transition is detected. Usually the limiter is designed in such a way that some regularity property of the actual solution to the conservation law is achieved. This is often sufficient to avoid spurious oscillations, and is not inconsistent with higher order accuracy in regions where the solution is smooth. A number of such schemes have been based on the Total Variation Diminishing (TVD) regularity property of scalar conservation laws. For many scalar conservation laws, the TVD approach achieves a significant increase in accuracy with only moderate additional complexity, and so it is a good candidate for our problem.

Unfortunately, when the flux has discontinuities, as is the case here, it is not reasonable to require the numerical approximations to be TVD, since the solution to the original conservation law will not generally have this property. Instead, we propose the novel approach of requiring that the *numerical flux* be TVD, because this is a property that the flux for the original conservation law does have. This so-called flux-TVD principle is also motivated by our convergence proof (for the first order scheme) in Appendix B, where the key steps in our compactness proof are bounds on the magnitude and the spatial total variation of the numerical flux. We find that enforcing this flux-TVD property damps out spurious oscillations, but still allows the scheme to have much better accuracy than the first order version. The same idea also applies to nonlinear conservation laws with discontinuous coefficients, which will be the topic of future work.

Let us concentrate on the following equation

$$\frac{\partial u}{\partial t} + \frac{\partial}{\partial x}(g(x)u + a(x)) = b(x)u, \quad (3.13)$$

i.e., we ignore all time-dependence of the coefficients for now. The first-order scheme is then

$$U_j^{n+1} = U_j^n - \lambda \Delta_+(g_j U_j^n + a_j) + \Delta t b_j U_j^n = U_j^n - \lambda \Delta_+ h_j^n + \Delta t b_j U_j^n.$$

For the purpose of a truncation error analysis, we write the scheme as

$$\frac{U_j^{n+1} - U_j^n}{\Delta t} + \frac{\Delta_+ h_j^n}{\Delta x} - b_j U_j^n = 0,$$

and insert a smooth solution, arriving, after a Taylor series expansion, at

$$\begin{aligned} \frac{U_j^{n+1} - U_j^n}{\Delta t} + \frac{\Delta_+ h_j^n}{\Delta x} - b_j U_j^n &= \frac{1}{\Delta t} \left(\frac{\lambda}{2} \Delta x^2 \frac{\partial}{\partial x} \left[(1 + \lambda g) \frac{\partial}{\partial x} (gu + a) \right] - \frac{\lambda}{2} \Delta t \Delta x \frac{\partial}{\partial x} (gbu) \right. \\ &\quad \left. - \frac{1}{2} \Delta t \cdot b \left[\lambda \Delta x \frac{\partial}{\partial x} (gu + a) - \Delta t b u \right] \right) + \mathcal{O}(\Delta x^2). \end{aligned} \quad (3.14)$$

In deriving this formula for the truncation error, we have used (3.13) to replace u_t , and, to replace the term $\partial^2 u / \partial t^2$, the relationship

$$\frac{\partial^2 u}{\partial t^2} = \frac{\partial}{\partial x} \left(g \left[\frac{\partial}{\partial x} (gu + a) - bu \right] \right) - b \left[\frac{\partial}{\partial x} (gu + a) - bu \right].$$

For the moment, let us ignore the sieve portion of the model, leaving us with the conservation law

$$\frac{\partial u}{\partial t} + \frac{\partial}{\partial x} (g(x)u + a(x)) = 0. \quad (3.15)$$

By closely examining the analysis in the previous section, one can see that the first order scheme for this PDE,

$$U_j^{n+1} = U_j^n - \lambda \Delta_+ h_j^n, \quad (3.16)$$

has the property that the numerical flux h_j^n is TVD:

$$\sum_{j=1}^{J\Delta} |\Delta_- h_j^{n+1}| \leq \sum_{j=1}^{J\Delta} |\Delta_- h_j^n|, \quad (3.17)$$

the property that we referred to above as flux-TVD. The scheme (3.16) approximates the conservation law (3.15) to first order, and the truncation error equals the first term on the right-hand side of (3.14), i.e.

$$\frac{1}{\Delta t} \frac{\lambda}{2} \Delta x^2 \frac{\partial}{\partial x} \left((1 + \lambda g) \frac{\partial}{\partial x} (gu + a) \right). \quad (3.18)$$

To construct a second-order scheme for (3.15), we will add flux corrections to (3.16), generating a Lax-Wendroff type scheme of the type described in [20], and then apply limiters to enforce the flux-TVD property. The second-order version of (3.16) will take the form

$$U_j^{n+1} = U_j^n - \lambda \Delta_+ (h_j^n + \hat{e}_{j-1/2}^n), \quad (3.19)$$

where $\hat{e}_{j-1/2}^n$ is a regularized version of the second-order correction $e_{j-1/2}^n$. Here the $\hat{}$ notation indicates that some limiter has been applied. A straightforward calculation reveals that for our simplified scheme (3.19) with the correction terms present, the first-order flux evolves according to

$$h_j^{n+1} = h_j^n - \lambda g_j \left(1 + \frac{\Delta_+ \hat{e}_{j-1/2}^n}{\Delta_+ h_j^n} \right) \Delta_+ h_j^n.$$

From this equation it is clear that the flux-TVD property (3.17) as well as a maximum principle for the numerical flux hold if

$$0 \leq -\lambda g_j \left(1 + \frac{\Delta_+ \hat{e}_{j-1/2}^n}{\Delta_+ h_j^n} \right) \leq 1. \quad (3.20)$$

Guided by the truncation error term (3.18), we let

$$e_{j+1/2}^n = -\frac{1}{2} (1 + \lambda g_j) \Delta_+ h_j^n.$$

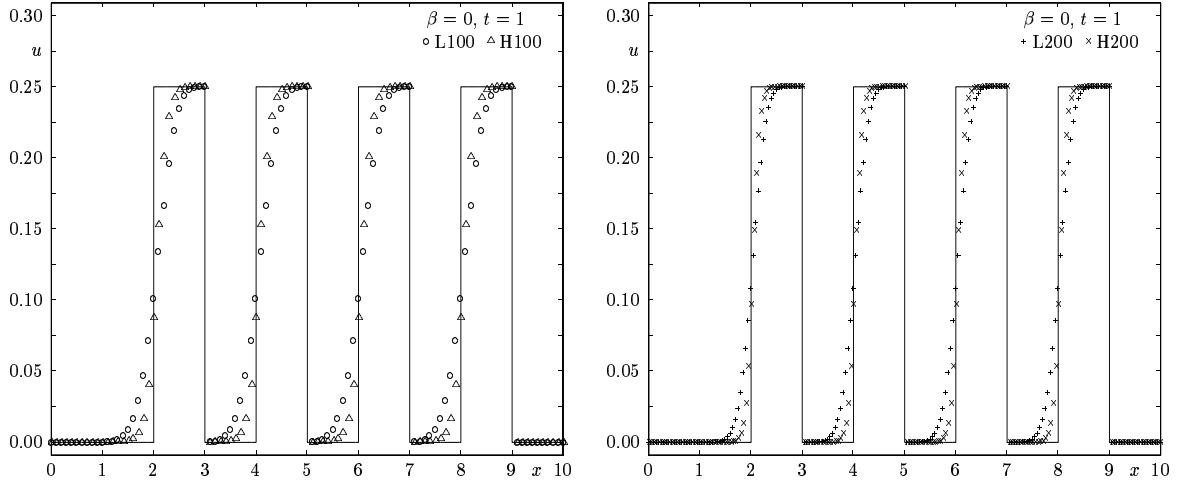


Figure 6. Numerical simulation of a ball mill with $\beta = 0$ at $t = 1$. Here and in Figures 7–14, numerical solutions are depicted by symbols and the exact solution by a solid line.

If we impose the CFL condition (recall that $g_j \leq 0$, and that we are ignoring the sieve term for now) $-\lambda g_j \leq 1$, then the condition (3.20) will be satisfied if we apply the limiter

$$\hat{e}_{j-1/2}^n = \min\{e_{j+1/2}^n, e_{j-1/2}^n\}, \quad j = 1, \dots, J^\Delta - 1. \quad (3.21)$$

It is clear that wherever the solution is smooth, application of the limiter in (3.21) will not destroy the formal second-order accuracy. One detail that needs some attention here is that (3.21) is not well-defined for $j = 0$. In the numerical examples we have set $\hat{e}_{-1/2} = \hat{e}_{1/2}$.

For the sieve portion of the scheme the formula for the truncation error (3.14) suggests that the correction term should be

$$-\frac{\lambda}{2}\Delta t\Delta_+(g_j b_j U_j^n) - \frac{1}{2}\Delta t b_j(\lambda\Delta_+ h_j^n - \Delta t b_j U_j^n).$$

With the sieve corrections included, the second order scheme is then

$$\begin{aligned} U_j^{n+1} = & U_j^n - \lambda\Delta_+(h_j^n + \hat{e}_{j-1/2}^n) \\ & + \Delta t b_j U_j^n - \frac{\lambda}{2}\Delta t\Delta_+(g_j b_j U_j^n) - \frac{1}{2}\Delta t b_j(\lambda\Delta_+ h_j^n - \Delta t b_j U_j^n). \end{aligned} \quad (3.22)$$

Our numerical experiments (see Section 4) indicate that this second order version is well-behaved, i.e., it suffices to apply limiters to the flux corrections, and no additional regularization processing is required for the second order corrections applied to the sieve term. Although we have not done so here, the flux-TVD approach for constructing second order schemes described above can be put on a rigorous theoretical footing, even for nonlinear conservation laws with discontinuous coefficients. We defer that analysis to a later paper.

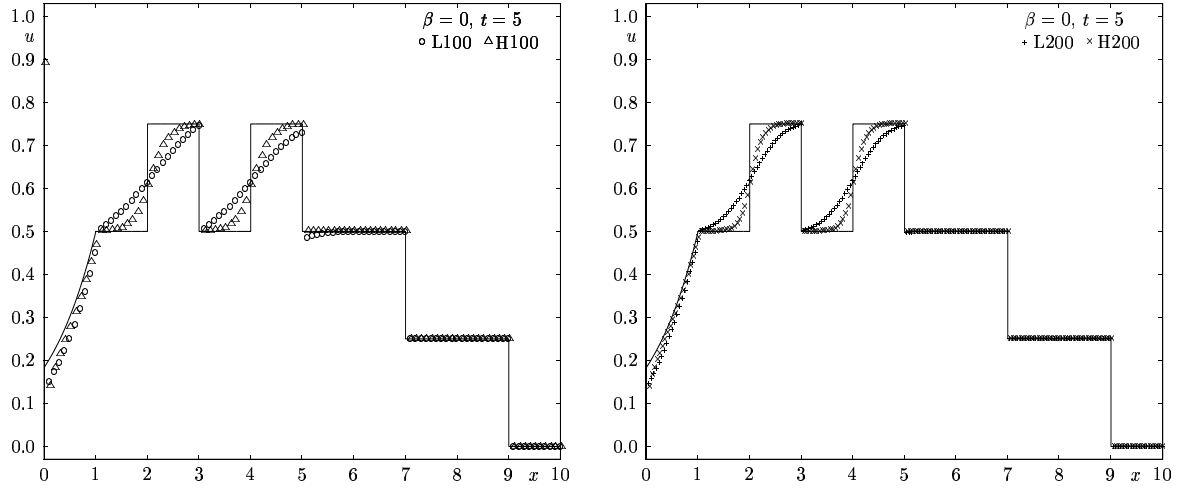


Figure 7. Numerical simulation of a ball mill with $\beta = 0$ at $t = 5$.

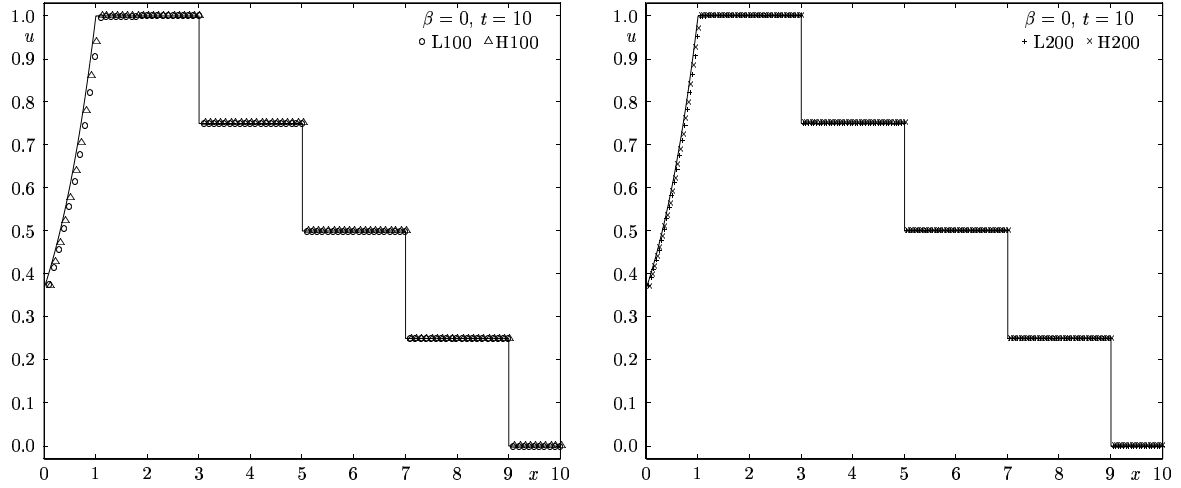


Figure 8. Numerical simulation of a ball mill with $\beta = 0$ at $t = 10$.

4. Numerical simulations

To test the two numerical schemes, we select three of the five cases for which an exact solution is presented in Section 2.3, and utilize the same parameters. Specifically, we restrict ourselves to $\alpha = -Q_S x_0$ and consider the solutions plotted in Figures 1, 2 and 4, corresponding to $\beta = 0$, $\beta = 0.5$, and $\beta = 1$, respectively. Consequently, the test cases differ in the value of β only. Figures 6–14 show the numerical results for these three cases, corresponding to solution profiles at times $t = 1$, $t = 5$ and $t = 10$ in each case. The numerical solutions have been produced by using $\lambda = 0.1$ and the discretizations $\Delta x = X/J^\Delta$ with $X = 10$ and $J^\Delta = 100$ for the left and $J^\Delta = 200$ for the right diagram in each of these figures. The runs with the low-accuracy first-order and the high-accuracy second-order scheme are denoted by L100, L200 and H100, H200, respectively. To record an error history and to measure convergence rates,

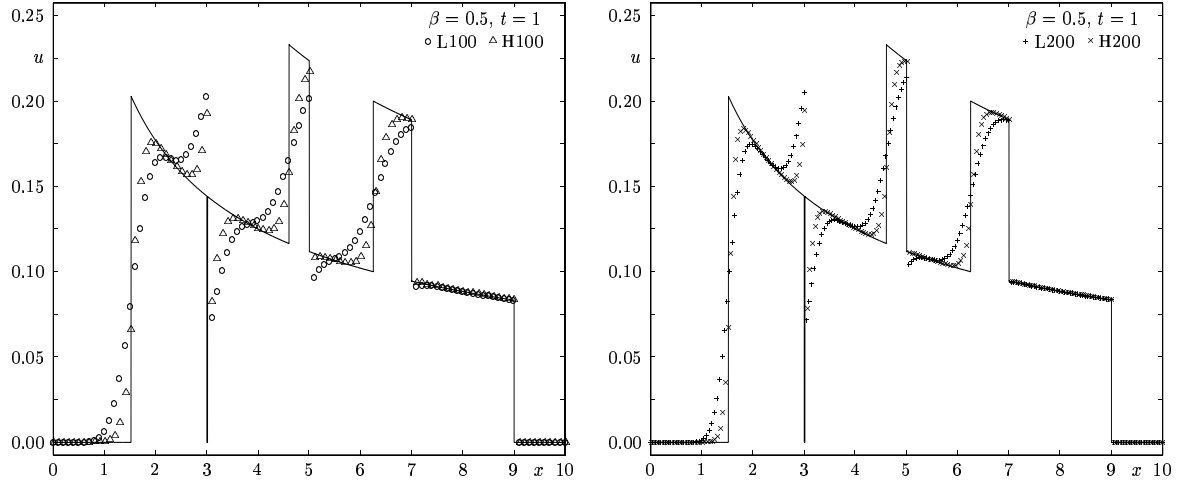


Figure 9. Numerical simulation of a ball mill with $\beta = 0.5$ at $t = 1$.

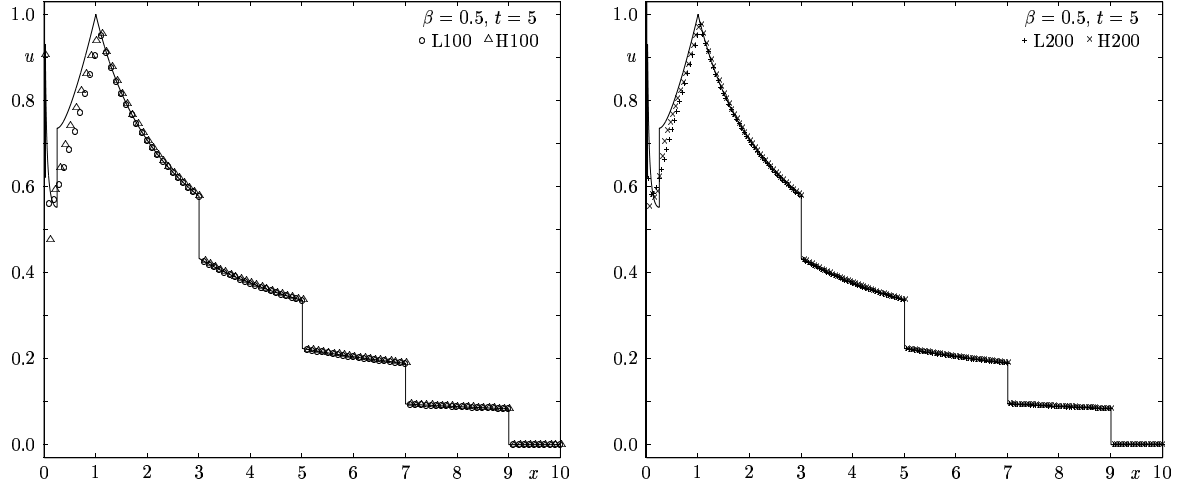


Figure 10. Numerical simulation of a ball mill with $\beta = 0.5$ at $t = 5$.

we have performed additional simulations with one coarser and several finer discretizations and measured the L^1 errors and convergence rates listed in Tables I–III.

Figure 6 shows that stationary discontinuities due to the jumps in $a(x)$ are sharply resolved, while the traveling discontinuities located around $x = 2, 4, 6$ and 8 are smeared out, which is a well-known property of standard monotone schemes for conservation laws. As expected, discontinuities are more sharply resolved by the second-order scheme. This also becomes visible in Figure 7. Moreover, the leftmost numerical solution points (corresponding to $x = 0$) attain high values that increase with J^Δ ; for example, at $t = 1$ we have $u_0^n > 1$ for the H200 scheme. These singular solution values are not plotted in this and subsequent figures. Figure 8 shows that the steady-state solution is approximated well by both families of schemes. However, a thin numerical boundary layer produced by high solution values at $x = 0$ persists.

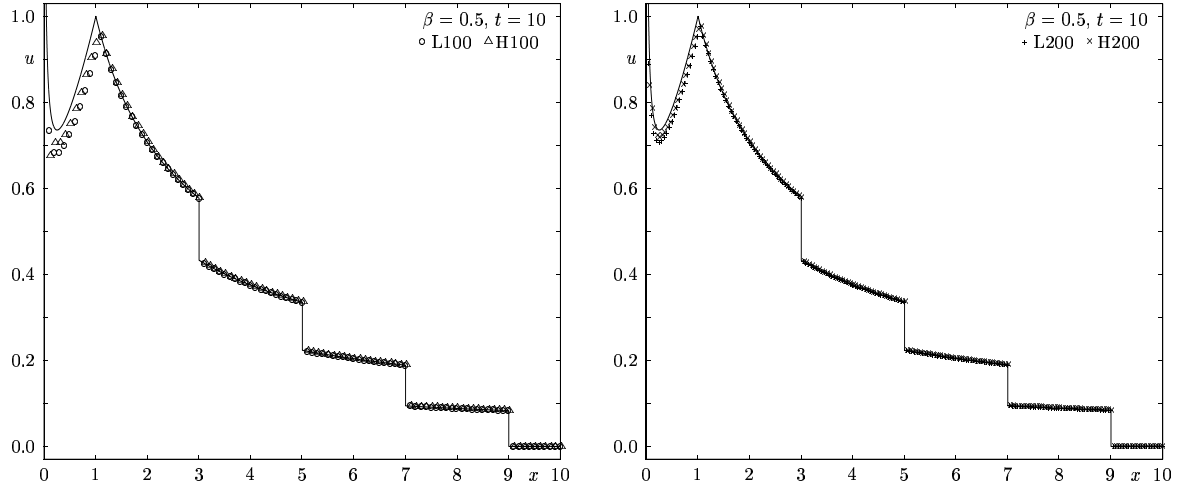


Figure 11. Numerical simulation of a ball mill with $\beta = 0.5$ at $t = 10$.

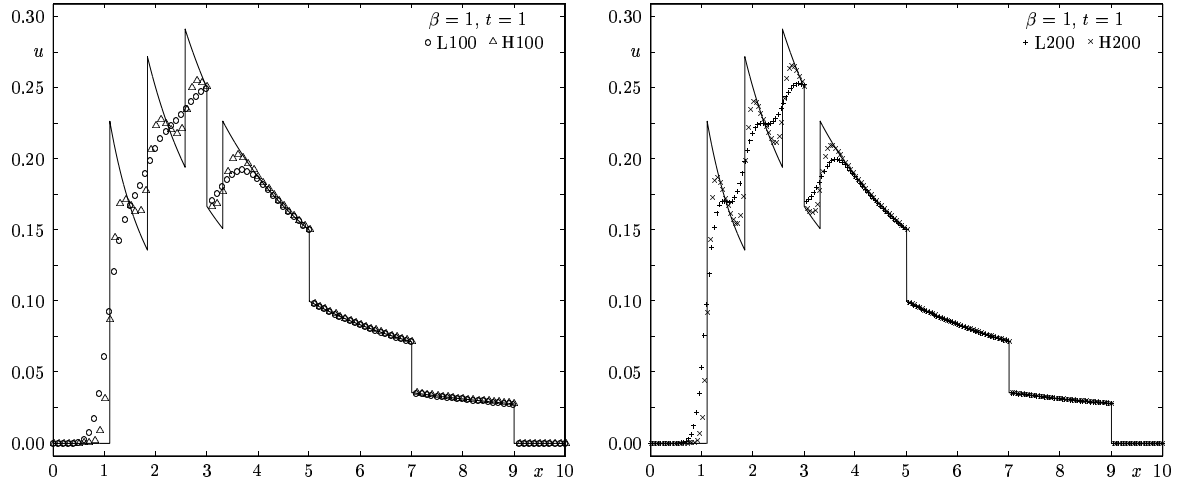


Figure 12. Numerical simulation of a ball mill with $\beta = 1$ at $t = 1$.

A new feature that can be seen in Figure 9 is a very narrow gap near $x = 3$, which closes a short time later on. The numerical solution exhibits a jump of nearly the same strength (near $x = 3$), but which is shifted upwards. Furthermore, we see for example that information traveling downstream from $x^1 = 9$ has already surpassed the next smaller discontinuity of $a(x)$ at $x^2 = 7$, so that the discontinuity of the numerical solution around $x^3 = 7$ (and, similarly, around $x = x^2 = 5$) is sharp, but the adjacent numerical values are too small. This spurious effect decreases with increasing accuracy, however. Figure 10 displays a situation in which the exact solution has attained steady state for $x > x_s = 1$ (see also Figure 4). Figure 9 illustrates that the second-order scheme is significantly more accurate on the interval $(0, 1]$ than the first-order version. This tendency is also reflected by the lower L^1 errors for the second-order scheme listed in the middle column of Table II. The superiority of the second-order scheme is also visible in the very similar Figure 11.

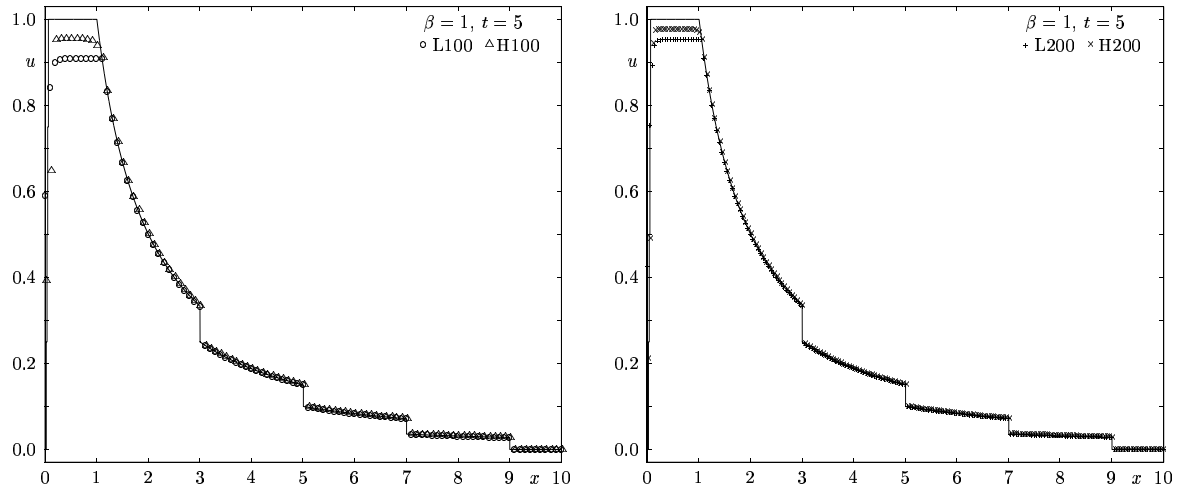


Figure 13. Numerical simulation of a ball mill with $\beta = 1$ at $t = 5$.

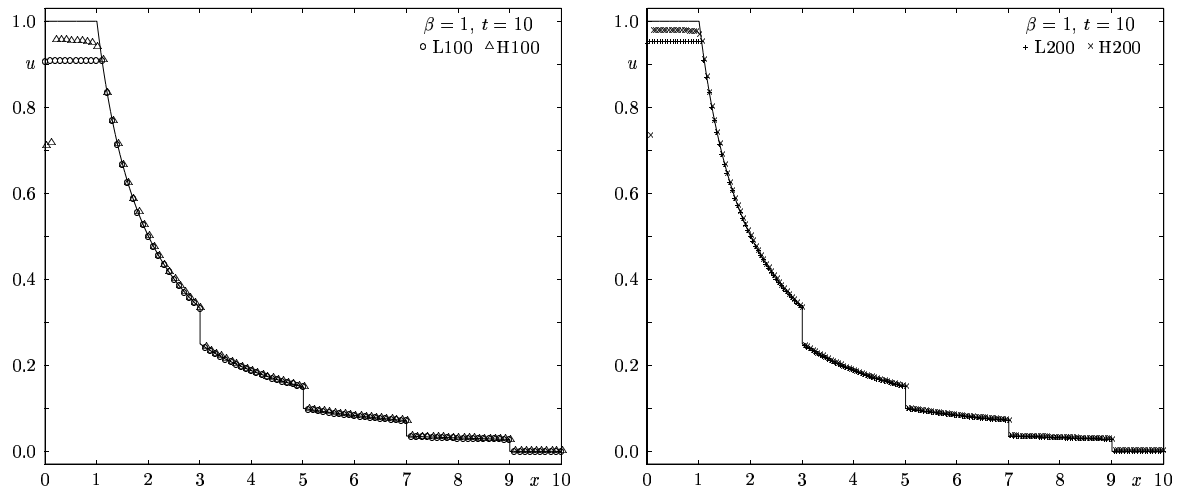


Figure 14. Numerical simulation of a ball mill with $\beta = 1$ at $t = 10$.

Unlike what we have seen in the previous two cases, the choice $\beta = 1$ does not lead to numerical solutions that become unbounded near $x = 0$. Figure 12 displays an exact solution profile with a number of sawtooth-shaped extrema. As expected, these ‘peaks’ are poorly approximated by the first-order scheme. The discontinuity at $x^4 = 3$ is sharply resolved, however. Figures 13 and 14 differ only in the solution near $x = 0$. The superiority of the second-order scheme becomes apparent in the error history recorded in Table III, and is also visible in these two figures in that the exact maximal solution value one is better approximated by the second-order scheme than by the first-order scheme with the same value of J^Δ .

Table I. L^1 errors for $\beta = 0$.

$J = \frac{10}{\Delta x}$	Scheme 1					
	$t = 1$		$t = 5$		$t = 10$	
	L^1 error	conv. rate	L^1 error	conv. rate	L^1 error	conv. rate
50	0.58122		0.57302		0.37836	
100	0.35585	0.708	0.40295	0.508	0.18758	1.012
200	0.22515	0.660	0.27644	0.544	0.09223	1.024
400	0.14677	0.617	0.18353	0.591	0.04567	1.014
800	0.09787	0.585	0.12209	0.588	0.02305	0.986
1600	0.06636	0.561	0.08256	0.564	0.01212	0.927
2000	0.05873	0.548	0.07305	0.549	0.01004	0.841
	Scheme 2					
	50	0.48088		0.48776		0.32963
	100	0.26259	0.873	0.27157	0.845	0.16402
	200	0.14687	0.838	0.15238	0.834	0.08188
	400	0.08400	0.806	0.08691	0.810	0.04101
	800	0.04898	0.778	0.05039	0.786	0.02072
	1600	0.02904	0.754	0.02970	0.763	0.01082
	2000	0.02462	0.741	0.02515	0.745	0.00893
						0.860

Table II. L^1 errors for $\beta = 0.5$.

$J = \frac{10}{\Delta x}$	Scheme 1					
	$t = 1$		$t = 5$		$t = 10$	
	L^1 error	conv. rate	L^1 error	conv. rate	L^1 error	conv. rate
50	0.23582		0.32149		0.27982	
100	0.17632	0.420	0.16958	0.923	0.14501	0.948
200	0.12419	0.506	0.09368	0.856	0.07457	0.960
400	0.08611	0.528	0.05545	0.757	0.03948	0.918
800	0.05965	0.530	0.03570	0.635	0.02154	0.874
1600	0.04148	0.521	0.02373	0.589	0.01212	0.830
2000	0.03667	0.552	0.02123	0.500	0.01013	0.803
	Scheme 2					
	50	0.19033		0.27433		0.25013
	100	0.11657	0.707	0.13859	0.985	0.12522
	200	0.07083	0.719	0.07461	0.894	0.06056
	400	0.04254	0.735	0.03945	0.919	0.03206
	800	0.02641	0.688	0.02088	0.918	0.01827
	1600	0.01601	0.722	0.01275	0.712	0.01072
	2000	0.01340	0.796	0.01107	0.635	0.00909

5. Appendix A. Weak solutions and uniqueness

With $g(x)$ allowed to vanish at the origin, solutions of Model 2 are not necessarily bounded near $x = 0$. Physically, this corresponds to an accumulation of balls that have been ground down to a size close to zero. To accommodate this lack of a bound, it is natural to work with the weighted L^1 norm

$$\|w\|_{L^1_g([0,X])} := \int_0^X |w(x)| |g(x)| dx.$$

Table III. L^1 errors for $\beta = 1$.

$J = \frac{10}{\Delta x}$	Scheme 1					
	$t = 1$		$t = 5$		$t = 10$	
	L^1 error	conv. rate	L^1 error	conv. rate	L^1 error	conv. rate
50	0.14028		0.25857		0.25416	
100	0.11202	0.324	0.15020	0.784	0.14217	0.838
200	0.08488	0.400	0.08648	0.796	0.07533	0.916
400	0.06113	0.474	0.04720	0.873	0.03880	0.957
800	0.04359	0.488	0.02655	0.830	0.01972	0.977
1600	0.03011	0.533	0.01436	0.887	0.00998	0.983
2000	0.02721	0.453	0.01250	0.620	0.00803	0.977
	Scheme 2					
	L^1 error	conv. rate	L^1 error	conv. rate	L^1 error	conv. rate
50	0.13033		0.22822		0.22465	
100	0.08417	0.631	0.12984	0.814	0.12260	0.874
200	0.05066	0.732	0.07550	0.782	0.06424	0.932
400	0.03105	0.707	0.03961	0.931	0.03292	0.965
800	0.01928	0.688	0.01985	0.996	0.01667	0.982
1600	0.01133	0.767	0.01025	0.953	0.00842	0.985
2000	0.00999	0.564	0.00874	0.713	0.00677	0.973

We use the notation $L_g^1([0, X])$ for the Banach space of measurable functions on $[0, X]$ for which this norm is finite. Solutions of Model 2 are also not generally continuous and thus need to be defined as weak solutions. For this purpose we introduce the space of test functions

$$\mathcal{D} := \left\{ \psi \in C(\overline{\Pi}_T) \mid \psi(0, t) = 0, \psi(x, T) = 0, \frac{\partial \psi}{\partial x} \in L^1(\Pi_T), \frac{\partial \psi}{\partial t} \in L^\infty(\Pi_T) \right\}.$$

DEFINITION 5.1 (Weak solution). *A function $u \in C([0, T]; L_g^1([0, X]))$ is called a weak solution of the initial-boundary value problem defining Model 2, (3.1), (3.3) and (3.4) if*

$$g(x)u + \gamma(t)a(x) \in L^\infty(\Pi_T) \quad (5.1)$$

and the following weak formulation of the problem is satisfied, for all test functions $\phi \in \mathcal{D}$:

$$\begin{aligned} & \int_0^T \int_0^X \left\{ u \frac{\partial \phi}{\partial t} + (g(x)u + \gamma(t)a(x)) \frac{\partial \phi}{\partial x} + b(x, t)u\phi \right\} dx dt \\ & - \int_0^T \gamma(t)a(X)\phi(X, t) dt + \int_0^X u_0(x)\phi(x, 0) dx = 0. \end{aligned} \quad (5.2)$$

The closed-form solutions to Model 2 that we derived in Section 2.3 are weak solutions in the sense of Definition 5.1. In Appendix B, we will show that the limits of a certain difference scheme are also weak solutions. We would like some assurance that the closed-form solutions and the limit of numerical solutions are identical, which leads us to consider the question of uniqueness. For the sake of simplicity, we restrict the analysis to the case where the sieve term b is independent of time, $b = b(x)$.

THEOREM 5.1 (Uniqueness). *Assume that the sieve term is independent of time, i.e., $b = b(x)$, and that $1/g \in L^1([0, X])$. If u and v are two weak solutions having the same initial data $u_0(x)$, then $u(x, t) = v(x, t)$ a.e. in Π_T .*

REMARK 5.1. With the assumption $1/g \in L^1([0, X])$, we are including all of the wear models of the type (1.1) with $0 \leq \beta < 1$.

Proof. Let u and v be a pair of weak solutions having the same initial data. Let $w := v - u$ denote their difference, and observe that due to the linearity of the problem, w satisfies

$$\int_0^T \int_0^X w \left(\frac{\partial \psi}{\partial t} + g(x) \frac{\partial \psi}{\partial x} + b(x) \psi \right) dx dt = 0 \quad (5.3)$$

for all test functions $\psi \in \mathcal{D}$. If we can show that the backward initial-boundary value problem

$$\frac{\partial \psi}{\partial t} + g(x) \frac{\partial \psi}{\partial x} + b(x) \psi = \phi(x, t), \quad \text{for a.e. } (x, t) \in \Pi_T, \quad \psi(0, t) = 0, \quad \psi(x, T) = 0 \quad (5.4)$$

has a solution $\psi \in \mathcal{D}$ for all C^∞ functions ϕ having support in Π_T , then by substituting ψ into (5.3), we will have

$$\int_0^T \int_0^X w \phi dx dt = 0,$$

implying that $w = 0$ a.e. in Π_T .

In fact, an explicit solution to (5.4) is given by

$$\psi(x, t) = \int_0^{T-t} z(x, t, \tau) d\tau, \quad (5.5)$$

where

$$z(x, t, \tau) := -\phi(\hat{y}, T - \tau) \exp \left(\int_x^{\hat{y}} \frac{b(s)}{g(s)} ds \right), \quad \hat{y} := y(x, T - t - \tau). \quad (5.6)$$

Here, $y \in C(\overline{\Pi_T}) \cap C^1(\Pi_T)$ is a classical solution to the initial-boundary value problem

$$\frac{\partial y}{\partial t} - g(x) \frac{\partial y}{\partial x} = 0, \quad y(x, 0) = x, \quad y(0, t) = 0. \quad (5.7)$$

Letting

$$P(x) := - \int_0^x \frac{dw}{g(w)}, \quad \Pi(t) := P^{-1}(t),$$

a specific formula for y is given by

$$y(x, t) = \begin{cases} \Pi(P(x) - t) & \text{for } t < P(x), \\ 0 & \text{for } t \geq P(x). \end{cases} \quad (5.8)$$

We will also need the partial derivatives of $y(x, t)$; for convenience, we denote partial derivatives in the remainder of this proof by y_t , y_x , and so on.

$$y_t(x, t) = \begin{cases} g(\Pi(P(x) - t)) & \text{for } t < P(x), \\ 0 & \text{for } t \geq P(x), \end{cases} \quad (5.9)$$

and

$$y_x(x, t) = \begin{cases} g(\Pi(P(x) - t))/g(x) & \text{for } t < P(x), \\ 0 & \text{for } t \geq P(x). \end{cases} \quad (5.10)$$

Here we have used

$$P'(x) = -1/g(x), \quad \Pi'(\zeta) = 1/P'(\Pi(t)) = -g(\Pi(t)).$$

Before continuing, let us also record the formulas for ψ_x and ψ_t :

$$\psi_x = \int_0^{T-t} z_x(x, t, \tau) d\tau, \quad \psi_t = \int_0^{T-t} z_t(x, t, \tau) d\tau - z(x, t, T-t), \quad (5.11)$$

where, with the notation $\hat{y}_x := y_x(x, T-t-\tau)$, $\hat{y}_t := y_t(x, T-t-\tau)$,

$$z_x(x, t, \tau) = -\phi_x(\hat{y}, T-t)\hat{y}_x \exp\left(\int_x^{\hat{y}} \frac{b(s)}{g(s)}\right) + z(x, t, \tau) \left[\frac{b(\hat{y})}{g(\hat{y})}\hat{y}_x - \frac{b(x)}{g(x)}\right], \quad (5.12)$$

and

$$z_t(x, t, \tau) = -\phi_x(\hat{y}, T-t)\hat{y}_t \exp\left(\int_x^{\hat{y}} \frac{b(s)}{g(s)}\right) + z(x, t, \tau) \left[\frac{b(\hat{y})}{g(\hat{y})}\hat{y}_t\right]. \quad (5.13)$$

It is clear that $y \in C(\overline{\Pi}_T)$. Note that because of our assumptions about $g(x)$, both $P(x)$ and $\Pi(t)$ are strictly increasing and vanish when their arguments are zero. In particular, for each $t \in (0, T)$, the set $Z(t) := \{x | 0 < x < \Pi(t)\}$ is a nonempty open interval, and all of y , y_x , y_t vanish identically for $x \in Z(t)$. With this in mind, it is not hard to see that all of y , y_x , y_t are continuous and bounded on Π_T . Similarly, for $0 < t < T$, $0 < \tau < T-t$, $\hat{y}(x, t)$, $\hat{y}_x(x, t)$, $\hat{y}_t(x, t)$ all vanish identically for $x \in Z(T-t-\tau)$, and thus all of \hat{y} , \hat{y}_x , \hat{y}_t are bounded on Π_T . Since $\text{supp}(\phi) \subseteq \Pi_T$, this in turn implies that $z(x, t, \tau)$, $z_x(x, t, \tau)$, $z_t(x, t, \tau)$ also vanish for $x \in Z(T-t-\tau)$. Using the formulas (5.5), (5.6), along with the observations above, it is easily checked that $\psi(0, t) = \psi(x, T) = 0$, and $\psi \in C(\overline{\Pi}_T)$.

To show that $\psi \in \mathcal{D}$, it remains to verify that $\psi_x \in L^1(\Pi_T)$, $\psi_t \in L^\infty(\Pi_T)$. In view of formula (5.13), showing that $\psi_t \in L^\infty(\Pi_T)$ boils down to recalling that \hat{y}_x and \hat{y}_t are bounded, and verifying that we have control of the second term of (5.13). Since z_t vanishes on $Z(T-t-\tau)$, we are only concerned with $x \notin Z(T-t-\tau)$. Both z and b are bounded, and for $x \notin Z(T-t-\tau)$, (5.8), (5.9) reveal that $\hat{y}_t/g(\hat{y}) = 1$.

To show that $\psi_x \in L^1(\Pi_T)$ we proceed in a similar manner. This time we find that there is a factor of $1/g(x)$ multiplying a bounded quantity, giving us an L^1 bound (since $1/g \in L^1$), but not an L^∞ bound. ■

REMARK 5.2. In the proof above we have used the duality relationship between the conservation law

$$\frac{\partial u}{\partial t} + \frac{\partial}{\partial x}(g(x)u) = b(x)u$$

and the transport equation (5.4). With this approach, one proves uniqueness for the (forward in time) original problem by proving existence for the (backward in time) dual problem. Note that we are not claiming uniqueness for solutions of the dual problem (5.4). Indeed reference [15], where this duality relationship is explained more completely, points out that in general, when uniqueness holds for the forward original problem, uniqueness fails for the backward dual problem.

6. Appendix B. Convergence proof for the first-order difference scheme

In this section we verify that our first order scheme (3.12) produces approximations to the initial boundary problem (3.1), (3.3), (3.4) that converge (along a subsequence) to a weak solution in the sense of Definition 5.1. There are two factors that complicate our analysis. First, solutions are not necessarily bounded, due to the fact that the coefficient vanishes at $x = 0$. Second, the source terms create discontinuities in the solution, and more importantly, lead to increases in the spatial variation of the solution. When analyzing first order schemes for simpler conservation laws, it is standard practice to proceed by proving a bound on the amplitude of the approximate solutions, along with a bound on the spatial variation, and a time-continuity estimate. By standard results [16], one can then verify convergence of the approximations along a subsequence as the mesh size tends to zero. Since bounds on the amplitude and the spatial variation are not possible in the present situation, we will instead establish these bounds for the numerical flux approximations defined by (6.1) below. These two bounds, along with a time continuity estimate, allow us to prove that the numerical flux converges, and then we can recover the actual solution u , since the value of the flux $g(x)u + \gamma(t)a(x)$ uniquely determines the value of u for this linear problem.

Denote the numerical flux by

$$h_j^n := g_j U_j^n + \gamma^n a_j, \quad (6.1)$$

and let

$$u^\Delta(x, t) := \sum_{j=0}^{J^\Delta} \sum_{n=0}^{N^\Delta} \chi_j^n(x, t) U_j^n, \quad h^\Delta(x, t) := \sum_{j=0}^{J^\Delta} \sum_{n=0}^{N^\Delta} \chi_j^n(x, t) h_j^n.$$

As mentioned above, we will prove compactness for the sequence h^Δ , and then recover the solution u by inverting h . We proceed via a sequence of lemmas which lead up to our main convergence result, Theorem 6.1.

LEMMA 6.1. *If the CFL condition (3.11) is satisfied, the numerical solution is nonnegative and the numerical flux is nonpositive, i.e.,*

$$U_j^n \geq 0, \quad h_j^n \leq 0 \quad \text{for } j = 1, \dots, J^\Delta, n = 1, \dots, N^\Delta. \quad (6.2)$$

Proof. For the first part of (6.2), assume that $U_j^n \geq 0$. Then the right-hand side of the marching formula

$$U_j^{n+1} = (1 + \lambda g_j + \Delta t b_j^n) U_j^n - \lambda g_{j+1} U_{j+1}^n - \lambda \gamma^n (a_{j+1} - a_j)$$

is also nonnegative due to the CFL condition and properties (3.5) and (3.6), respectively. It is then clear that $U_j^{n+1} \geq 0$, and the desired result follows by induction on n . For the second part of (6.2), we check (6.1) and use the following facts: $U_j^n \geq 0$, $g_j \leq 0$, $\gamma^n \leq 0$, $a_j \geq 0$. ■

The following lemma provides the discrete version of the bound (5.1) on the amplitude of the flux that is satisfied by a weak solution to the initial value problem (3.1), (3.3), (3.4).

LEMMA 6.2. *The numerical flux h_j^n is bounded independently of Δ , i.e.,*

$$|h_j^n| \leq C_1 \quad \text{for all } 0 \leq j \leq J^\Delta \text{ and } 0 \leq n \leq N^\Delta. \quad (6.3)$$

Proof. It is easily checked that the flux evolves according to

$$h_j^{n+1} = (1 + \lambda g_j) h_j^n - \lambda g_{j+1} h_{j+1}^n + \Delta t g_j b_j^n U_j^n + a_j (\gamma^{n+1} - \gamma^n). \quad (6.4)$$

From this expression, along with the observation that $\Delta t g_j b_j^n U_j^n \geq 0$, we obtain

$$h_j^{n+1} \geq (1 + \lambda g_j) h_j^n - \lambda g_{j+1} h_{j+1}^n + a_j (\gamma^{n+1} - \gamma^n) \geq \min\{h_j^n, h_{j+1}^n\} + a_j (\gamma^{n+1} - \gamma^n).$$

Recalling that $h_j^n \leq 0$, we now see that

$$|h_j^n| \leq \max_j |h_j^0| + 2A\Gamma \leq G\|u_0\| + 2A\Gamma. \quad \blacksquare$$

LEMMA 6.3. *There is a constant C_2 independent of the mesh size Δ such that the following spatial variation bound for the numerical flux holds:*

$$\sum_{j=1}^{J\Delta} |\Delta_- h_j^n| \leq C_2, \quad 0 \leq n \leq N\Delta. \quad (6.5)$$

Proof. Starting from the expression (6.4) for the evolution of the numerical flux, we find that the flux differences evolve according to

$$\begin{aligned} \Delta_- h_j^{n+1} = & (1 - \lambda g_{j-1}) \Delta_+ h_{j-1}^n - \lambda g_j \Delta_+ h_j^n + b_j^n \Delta t \Delta_- h_j^n \\ & + h_{j-1} \Delta t \Delta_- b_j^n + (\gamma^{n+1} - \gamma^n) \Delta_- a_j - \Delta t \gamma^n b_j^n \Delta_- a_j - \Delta t \gamma^n a_{j-1} \Delta_- b_j^n. \end{aligned} \quad (6.6)$$

Taking absolute values and applying the CFL condition (3.11), we get

$$\begin{aligned} \sum_{j=1}^{J\Delta} |\Delta_- h_j^{n+1}| \leq & (1 + B\Delta t) \sum_{j=1}^{J\Delta} |\Delta_- h_j^n| + \|h\| \Delta t \sum_{j=1}^{J\Delta} |\Delta_- b_j^n| \\ & + |\gamma^{n+1} - \gamma^n| |a|_{BV} + \Delta t \Gamma B |a|_{BV} + \Delta t \Gamma A \sum_{j=1}^{J\Delta} |\Delta_- b_j^n|. \end{aligned}$$

Applying this inequality inductively, we arrive at

$$\begin{aligned} \sum_{j=1}^{J\Delta} |\Delta_- h_j^n| \leq & (1 + B\Delta t)^n \left(\sum_{j=1}^{J\Delta} |\Delta_- h_j^0| + \|h\| \Delta t \sum_{\nu=0}^{n-1} \sum_{j=1}^{J\Delta} |\Delta_- b_j^\nu| \right. \\ & \left. + \sum_{\nu=0}^{n-1} |\gamma^{\nu+1} - \gamma^\nu| |a|_{BV} + n \Delta t \Gamma B |a|_{BV} + \Delta t \Gamma A \sum_{\nu=0}^{n-1} \sum_{j=1}^{J\Delta} |\Delta_- b_j^\nu| \right) \\ \leq & e^{BT} \left(\sum_{j=1}^{J\Delta} |\Delta_- h_j^0| + \|h\| |b|_{BV} + |\gamma|_{BV} |a|_{BV} + \Gamma T B |a|_{BV} + \Gamma A |b|_{BV} \right). \end{aligned}$$

The proof is completed via the estimate

$$\sum_{j=1}^{J\Delta} |\Delta_- h_j^0| \leq G |u_0|_{BV} + \|u_0\| |g|_{BV} + \Gamma |a|_{BV}.$$

Here $|b|_{BV}$ denotes two-dimensional variation, while $|a|_{BV}$, $|\gamma|_{BV}$ and $|g|_{BV}$ denote one-dimensional variation. \blacksquare

LEMMA 6.4. *The L^1 norm of the approximate solution is bounded for $t \in [0, T]$, i.e., there is a constant C_3 independently of the mesh size Δ such that*

$$\sum_{j=0}^{J^\Delta} |U_j^n| \Delta x \leq C_3, \quad 0 \leq n \leq N^\Delta. \quad (6.7)$$

Proof. From the definition of the scheme (3.12),

$$|U_j^{n+1}| \leq |U_j^n| + \lambda |\Delta_+ h_j^n| + \Delta t B |U_j^n|.$$

Multiplying by Δx and summing over j yields

$$\sum_{j=0}^{J^\Delta} |U_j^{n+1}| \Delta x \leq (1 + B \Delta t) \sum_{j=0}^{J^\Delta} |U_j^n| \Delta x + \lambda C_2 \Delta x.$$

Using this inequality to proceed inductively, and applying $\lambda \Delta x = \Delta t$, we get

$$\sum_{j=0}^{J^\Delta} |U_j^n| \Delta x \leq e^{BT} \sum_{j=0}^{J^\Delta} |U_j^0| \Delta x + C_2 \frac{e^{BT} - 1}{B}. \quad \blacksquare$$

LEMMA 6.5. *There is a constant C_4 independent of the mesh size Δ such that*

$$\sum_{j=0}^{J^\Delta} |U_j^{n+1} - U_j^n| \Delta x \leq C_4 \Delta t, \quad 0 \leq n \leq N^\Delta - 1. \quad (6.8)$$

Proof. From the definition of the scheme, and using $\lambda \Delta x = \Delta t$, we have

$$\sum_{j=0}^{J^\Delta} |U_j^{n+1} - U_j^n| \Delta x \leq \lambda \sum_{j=1}^{J^\Delta} |\Delta_- h_j^n| \Delta x + B \Delta t \sum_{j=0}^{J^\Delta} |U_j^n| \Delta x \leq C_2 \Delta t + B C_3 \Delta t. \quad \blacksquare$$

THEOREM 6.1. *The approximations u^Δ converge along a subsequence a.e. in Π_T to a weak solution u of the initial value problem (3.1), (3.3), (3.4). For each fixed $t \in [0, T]$, as $\Delta \rightarrow 0$ along this subsequence,*

$$u^\Delta(\cdot, t) \rightarrow u(\cdot, t) \text{ in } L_g^1([0, X]). \quad (6.9)$$

Additionally, for each $\epsilon \in (0, X)$, $u^\Delta(\cdot, t)$ converges to $u(\cdot, t)$ along the same subsequence in $L^1([\epsilon, X] \times [0, T])$ as $\Delta \rightarrow 0$. If the sieve term is time-independent, i.e., $b = b(x)$, and $1/g \in L^1[0, X]$ then the entire sequence converges to the unique weak solution guaranteed by Theorem 5.1.

Proof. Let $S = \{t_1, t_2, \dots\}$ be a countable dense subset of $[0, T]$. For the sequence of functions $h^\Delta(\cdot, t_1)$ we have an L^∞ bound (Lemma 6.2), and a bound on the total variation (Lemma 6.3). Also, the L^1 bound for $u^\Delta(\cdot, t_1)$ (Lemma 6.4) readily implies an L^1 bound for h^Δ . All of these bounds are independent of the mesh size Δ . By standard compactness results, there is a function $h^{\lim}(\cdot, t_1) \in L^1([0, X]) \cap L^\infty([0, X])$ and a subsequence of $\{h^\Delta(\cdot, t_1)\}_\Delta$, which we do

not bother to relabel, such that $h^\Delta(\cdot, t_1) \rightarrow h^{\lim}(\cdot, t_1)$ in $L^1([0, X])$ and a.e. in $[0, X]$. In view of the identity

$$u^\Delta(x, t_1) = \frac{h^\Delta(x, t_1) - \gamma^\Delta(t) a^\Delta(x)}{g^\Delta(x)}, \quad x \in (0, X], \quad (6.10)$$

we recover the solution u from h^{\lim} via

$$u(x, t_1) := \frac{h^{\lim}(x, t_1) - \gamma(t_1) a(x)}{g(x)}, \quad x \in (0, X]. \quad (6.11)$$

It is clear that the right-hand side of (6.10) converges to the right-hand side of (6.11) a.e. in $[0, X]$, and thus $u^\Delta(\cdot, t_1) \rightarrow u(\cdot, t_1)$ a.e. in $[0, X]$. Next, we claim that

$$\int_0^X |u^\Delta(x, t_1) - u(x, t_1)| |g(x)| dx \rightarrow 0 \text{ as } \Delta \rightarrow 0. \quad (6.12)$$

To prove this claim, we use the triangle inequality to derive

$$\begin{aligned} \int_0^X |u^\Delta(x, t_1) - u(x, t_1)| |g(x)| dx &\leq \int_0^X |g^\Delta(x) u^\Delta(x, t_1) - g(x) u(x, t_1)| dx \\ &\quad + \int_0^X |u^\Delta(x, t_1)| |g(x) - g^\Delta(x)| dx. \end{aligned} \quad (6.13)$$

The first integral on the right-hand side of (6.13) converges to zero; this follows from $h^\Delta(\cdot, t_1) \rightarrow h(\cdot, t_1)$ in $L^1([0, X])$. The second integral can be estimated by

$$\int_0^X |u^\Delta(x, t_1)| |g(x) - g^\Delta(x)| dx \leq \sup_{x \in [0, X]} |g(x) - g^\Delta(x)| \int_0^X |u^\Delta(x, t_1)| dx. \quad (6.14)$$

The term on the right side of (6.14) converges to zero, thanks to our uniform L^1 bound on u^Δ (Lemma 6.4), and the fact that g is uniformly continuous on $[0, X]$.

We can repeat this argument with t_2 replacing t_1 , and starting from a subsequence of the subsequence used to construct $u(\cdot, t_1)$, giving us $u(\cdot, t_2) \in L_g^1([0, X])$ and $u^\Delta(\cdot, t_2) \rightarrow u(\cdot, t_2)$. Continuing this way, taking a subsequence of the previous one at each step, and then using the standard diagonalization process, we get a function $u(x, t)$, which is defined for $t \in S$ such that $u(\cdot, t) \in L_g^1([0, X])$, and $u^\Delta(\cdot, t) \rightarrow u(\cdot, t)$ in $L_g^1([0, X])$ for $t \in S$.

As a consequence of the time continuity estimate (Lemma 6.5), $t \mapsto u(\cdot, t)$ is a uniformly continuous mapping of the dense subset S into $L_g^1([0, X])$. Since $L_g^1([0, X])$ is complete, the mapping can be extended uniquely to a uniformly continuous mapping $t \mapsto u(\cdot, t)$ whose domain is the entire interval $[0, T]$. A straightforward estimate using the triangle inequality and uniform continuity in time shows that $u^\Delta(\cdot, t) \rightarrow u(\cdot, t)$ in $L_g^1([0, X])$ for $t \in [0, T]$.

For any $\epsilon > 0$, both $u^\Delta(\cdot, t)$ and $u(\cdot, t)$ are bounded in $[\epsilon, X]$, and the bound is independent of both Δ and $t \in [0, T]$. The quantity

$$\Lambda^\Delta(t) := \int_\epsilon^X |u^\Delta(x, t) - u(x, t)| dx$$

thus converges boundedly to zero, and so by the bounded convergence theorem,

$$\int_0^T \int_\epsilon^X |u^\Delta(x, t) - u(x, t)| dx dt = \int_0^T \Lambda^\Delta(t) dt$$

also converges to zero. By passing to a further subsequence, we have $u^\Delta \rightarrow u$ boundedly a.e. in $[\epsilon, X] \times [0, T]$. By taking a countable decreasing sequence $\{\epsilon_i\}_{i=1}^\infty$ with $\epsilon_i \rightarrow 0$, and employing another diagonalization process, we can arrange that the subsequence of approximations u^Δ converges to u a.e. in Π_T .

In what follows, we will use the observations that $u(\cdot, t) \in L^1([0, X])$, and $u \in L^1(\Pi_T)$. These facts follow easily from Lemma 6.4, along with an application of Fatou's Lemma. Also, since $g(x)$ is bounded away from zero if x is bounded away from zero, for any $\epsilon \in (0, X)$, the solution u lies in $C([0, T]; L^1([\epsilon, X]))$. Moreover, for the subsequence constructed above,

$$u^\Delta(\cdot, t) \rightarrow u \text{ in } L^1([\epsilon, X]) \text{ and boundedly a.e. in } [\epsilon, X], \quad t \in [0, T]. \quad (6.15)$$

Our goal now is to show that u is a weak solution. We start with the observation that the bound (5.1) on the amplitude of the flux is satisfied for the limit solution u ; this is a direct result of Lemma 6.2. To show that (5.2) is satisfied, fix $\epsilon \in (0, X)$, and let $\phi \in C^1([\epsilon, X] \times [0, T])$ with support contained in $[\epsilon, X] \times [0, T]$. We write the scheme in the form

$$\frac{U_j^{n+1} - U_j^n}{\Delta t} + \frac{\Delta_+}{\Delta x} (g_j U_j^n + \gamma^n a_j) - b_j^n U_j^n = 0,$$

multiply by $\phi(x_j, t^n) \Delta t \Delta x$, and then sum over $0 \leq n \leq N^\Delta - 1$, $0 \leq J^\Delta - 1$. After two summations by parts (one in j , and one in n), and letting $\phi_j^n = \phi(x_j, t^n)$, we arrive at

$$\begin{aligned} & \Delta t \Delta x \sum_{n=0}^{N^\Delta-1} \sum_{j=0}^{J^\Delta-1} U_j^n \frac{\phi_j^n - \phi_j^{n-1}}{\Delta t} - \Delta x \sum_{j=0}^{J^\Delta-1} U_j^{N^\Delta} \phi_j^{N^\Delta-1} + \Delta x \sum_{j=0}^{J^\Delta-1} U_j^0 \phi_j^0 \\ & + \Delta t \Delta x \sum_{n=0}^{N^\Delta-1} \sum_{j=0}^{J^\Delta-1} (g_j U_j^n + \gamma^n a_j) \frac{\phi_j^n - \phi_{j-1}^n}{\Delta x} - \Delta t \sum_{n=0}^{N^\Delta-1} \gamma^n a_{J^\Delta} \phi_{J^\Delta-1}^n \\ & + \Delta t \Delta x \sum_{n=0}^{N^\Delta-1} \sum_{j=0}^{J^\Delta-1} b_j^n U_j^n \phi_j^n = 0. \end{aligned} \quad (6.16)$$

Here we have used $\phi_0^n = 0$ and $U_{J^\Delta}^n = 0$ to eliminate two boundary sums that would otherwise appear. Recalling our bound on $g_j U_j^n + \gamma^n a_j$, we obtain by the bounded convergence theorem

$$\Delta t \Delta x \sum_{n=0}^{N^\Delta-1} \sum_{j=0}^{J^\Delta-1} (g_j U_j^n + \gamma^n a_j) \frac{\phi_j^n - \phi_{j-1}^n}{\Delta x} \rightarrow \int_0^T \int_0^X (g(x)u + \gamma(t)a(x)) \frac{\partial \phi}{\partial x}(x, t) dx dt. \quad (6.17)$$

Yet another application of the bounded convergence theorem gives

$$\Delta t \sum_{n=0}^{N^\Delta-1} \gamma^n a_{J^\Delta} \phi_{J^\Delta-1}^n \rightarrow \int_0^T \gamma(t)a(X)\phi(X, t) dt. \quad (6.18)$$

For the third sum on the first line of (6.16), the bounded convergence theorem gives

$$\Delta x \sum_{j=0}^{J^\Delta-1} U_j^0 \phi_j^0 \rightarrow \int_0^X u_0(x) \phi(x) dx. \quad (6.19)$$

For the sum on the last line of (6.16), we use that $u^\Delta \rightarrow u$ in $L^1([\epsilon, X] \times [0, T])$, along with the assumption that ϕ vanishes for $x \leq \epsilon$ to conclude that

$$\Delta t \Delta x \sum_{n=0}^{N^\Delta-1} \sum_{j=0}^{J^\Delta-1} b_j^n U_j^n \phi_j^n \rightarrow \int_0^T \int_0^X b(x, t) u \phi \, dx \, dt. \quad (6.20)$$

Similarly, using 6.15, along with the fact that $\phi(x, T) = 0$, we have

$$\Delta x \sum_{j=0}^{J^\Delta-1} U_j^{N^\Delta} \phi_j^{N^\Delta-1} \rightarrow \int_0^X u(x, T) \phi(x, T) \, dx = 0. \quad (6.21)$$

Finally, for the first sum on the first line of (6.16), using the mean value theorem, we write

$$U_j^n \frac{\phi_j^n - \phi_j^{n-1}}{\Delta t} = U_j^n \frac{\partial \phi}{\partial t}(x_j, \tau^n)$$

where $|\tau^n - t^n| \leq \Delta t$. Again using the fact that $u^\Delta \rightarrow u$ in $L^1([\epsilon, X] \times [0, T])$, along with the assumption that ϕ vanishes for $x \leq \epsilon$, we have

$$\Delta t \Delta x \sum_{n=0}^{N^\Delta-1} \sum_{j=0}^{J^\Delta-1} U_j^n \frac{\phi_j^n - \phi_j^{n-1}}{\Delta t} \rightarrow \int_0^T \int_0^X u \frac{\partial \phi}{\partial t} \, dx \, dt. \quad (6.22)$$

Combining (6.17) through (6.22), we see that for our class of regularized test functions, u satisfies (5.2). We still must show that u satisfies (5.2) for all $\phi \in \mathcal{D}$. Let $\phi \in \mathcal{D}$. For $\epsilon \in (0, X)$, it is possible to construct a set of regularized approximations $\phi^\epsilon \in C^1([\epsilon, X] \times [0, T])$ with support in $[\epsilon, X] \times [0, T)$ such that

$$\phi^\epsilon \rightarrow \phi, \quad \frac{\partial \phi^\epsilon}{\partial t} \rightarrow \frac{\partial \phi}{\partial t} \text{ boundedly a.e. in } \Pi_T, \quad \frac{\partial \phi^\epsilon}{\partial x} \rightarrow \frac{\partial \phi}{\partial x} \text{ in } L^1(\Pi_T),$$

For our regularized test functions, we have

$$\begin{aligned} & \int_0^T \int_0^X \left\{ u \frac{\partial \phi^\epsilon}{\partial t} + (g(x)u - \gamma(t)a(x)) \frac{\partial \phi^\epsilon}{\partial x} + b(x, t) u \phi^\epsilon \right\} \, dx \, dt \\ & - \int_0^T \gamma(t) a(X) \phi^\epsilon(X, t) \, dt + \int_0^X u_0(x) \phi^\epsilon(x, 0) \, dx = 0, \end{aligned} \quad (6.23)$$

Now letting $\epsilon \downarrow 0$, recalling that $u \in L^1(\Pi_T)$, $g(x)u - \gamma(t)a(x) \in L^\infty(\Pi_T)$, and applying the dominated convergence theorem yields (5.2) for $\psi \in \mathcal{D}$.

When $b = b(x)$, $1/g \in L^1([0, X])$, we have uniqueness (Theorem 5.1), and so the entire sequence converges to the unique weak solution u . \blacksquare

Acknowledgements

We acknowledge support by the Collaborative Research Center (Sonderforschungsbereich) 404 at the University of Stuttgart, the BeMatA program of the Research Council of Norway, and the European network HYKE, funded by the EC as contract HPRN-CT-2002-00282.

References

1. H.M. Hulburt and S. Katz, Some problems in particle technology, *Chem. Eng. Sci.* 19 (1964) 555–574.
2. D. Verkoijen, G.A. Pouw, G.M.H. Meesters and B. Scarlett, Population balances for particulate processes—a volume approach, *Chem. Eng. Sci.* 57 (2002) 2287–2303.
3. D. Ramkrishna, *Population Balances—Theories and Applications to Particulate Systems in Engineering*, San Diego: Academic Press (2000).
4. R.H. Perry, D.W. Green and J.O. Maloney, *Perry's Chemical Engineer's Handbook*, Seventh Ed. New York: McGraw-Hill (1998).
5. J.M. Menacho, Comments on 'A contribution to ball wear and ball size distribution in tumbling mills' by L.A. Vermeulen, *Powder Technol.* 47 (1986) 97–99.
6. J.M. Menacho and F. Concha, Mathematical model of ball wear in grinding mills: I. Zero-order wear rate, *Powder Technol.* 47 (1986) 87–96.
7. J.M. Menacho and F. Concha, Mathematical model of ball wear in grinding mills: II. General solution, *Powder Technol.* 52 (1987) 267–277.
8. L.A. Vermeulen, A contribution to 'Ball wear and ball size distributions in tumbling ball mills', *Powder Technol.* 46 (1986) 281–285.
9. L.G. Austin and R.R. Klimpel, Ball wear and ball size distribution in tumbling ball mills, *Powder Technol.* 41 (1985) 279–286.
10. F.C. Bond, Wear and size distribution of grinding balls, *Trans. Amer. Instn. Min. Met. Engrs.* 153 (1943) 373–385.
11. F.C. Bond, Grinding ball size selection, *Mining Eng.* 10 (1958) 592–595.
12. E.W. Davis, Fine crushing in ball-mills, *Trans. Amer. Instn. Min. Met. Engrs.* 61 (1919) 250–296.
13. R.J. LeVeque, *Finite Volume Schemes for Hyperbolic Problems*. Cambridge: Cambridge University Press (2000) 577 pp.
14. R.C. McOwen, *Partial Differential Equations: Methods and Applications*, Second Ed. Upper Saddle Point: Pearson Education (2003) 464pp.
15. F. Bouchut and F. James, One-dimensional transport equations with discontinuous coefficients, *Nonlin. Anal. Real World Appl.* 32 (1998) 891–933.
16. M. G. Crandall and A. Majda, Monotone difference approximations for scalar conservation laws, *Math. Comp.* 34 (1980) 1–21.
17. A. Harten, On a class of high resolution total-variation-stable finite difference schemes, *SIAM J. Numer. Anal.* 21 (1984) 1–23.
18. A. Harten, S. Osher, B. Engquist, S. Chakravarthy, Some results on uniformly high order accurate essentially non-oscillatory schemes, *Appl. Numer. Math.* 2 (1986) 347–377.
19. S. Osher, Convergence of generalized MUSCL schemes *SIAM J. Numer. Anal.* 22 (1985) 217–235.
20. P.K. Sweby, High resolution schemes using flux limiters for hyperbolic conservation laws, *SIAM J. Numer. Anal.* 21 (1984) 995–1011.